
KOHLER®



1684653-T2

记录您的型号：
Record your model number:_____

您的产品可能与所示图片效果有所不同，安装步骤相同。

请遵守当地管路安装及建筑条例。

本产品需与 3 孔墙出水浴缸花洒龙头搭配使用。

关闭供水系统。

在安装或使用本产品之前阅读所有说明。

请保存说明书。

所需工具和材料：

1A. 润滑脂

安装步骤：

2A. 去掉接头上的保护套。**确保接头上有 O 型圈并涂有润滑脂。**

3A. 根据实际需求确定三个本体组件在基板上的安装位置，以实现墙外六种不同的安装效果。图示展示了搭配 3 孔墙出水浴缸花洒龙头 K-EX40834T-4（需另行购买）后的其中两种安装效果。**注意：请仔细确定这三个部件的安装位置，墙壁安装好后无法再调换位置。**

4A. 安装三个本体组件到基板上，锁紧螺钉。

5A. 用 PPR 管(客户自备)连接本体组件，确保所有连接处密封可靠。

6A. 到装修好的墙面的最大距离。

6B. 到装修好的墙面的最小距离。

7A. 左边接热水。

7B. 右边接冷水。

8A. 本产品只接受水压测试，且测试前需先排空管路与龙头之间的空气。测试水压不超过 0.8 MPa (8 bar)，时间不超过 30 分钟。

9A. 使用水平仪确保产品处于水平位置。


10A. 完成墙面施工，装修好的墙面孔最大不超过直径 2-3/16"（56 mm）。

需要帮助？ 请联系我们的客户服务中心。

- 中国大陆：+(86) 800-820-2628, +(86) 400-820-2628
- **保养和清洁：** kohler.com.cn/support/care-and-cleaning/

本产品支持**科勒®水龙头五年有限担保**，详见包装所附的《合格证》。

The product shown may differ from your actual product. The installation steps still apply.

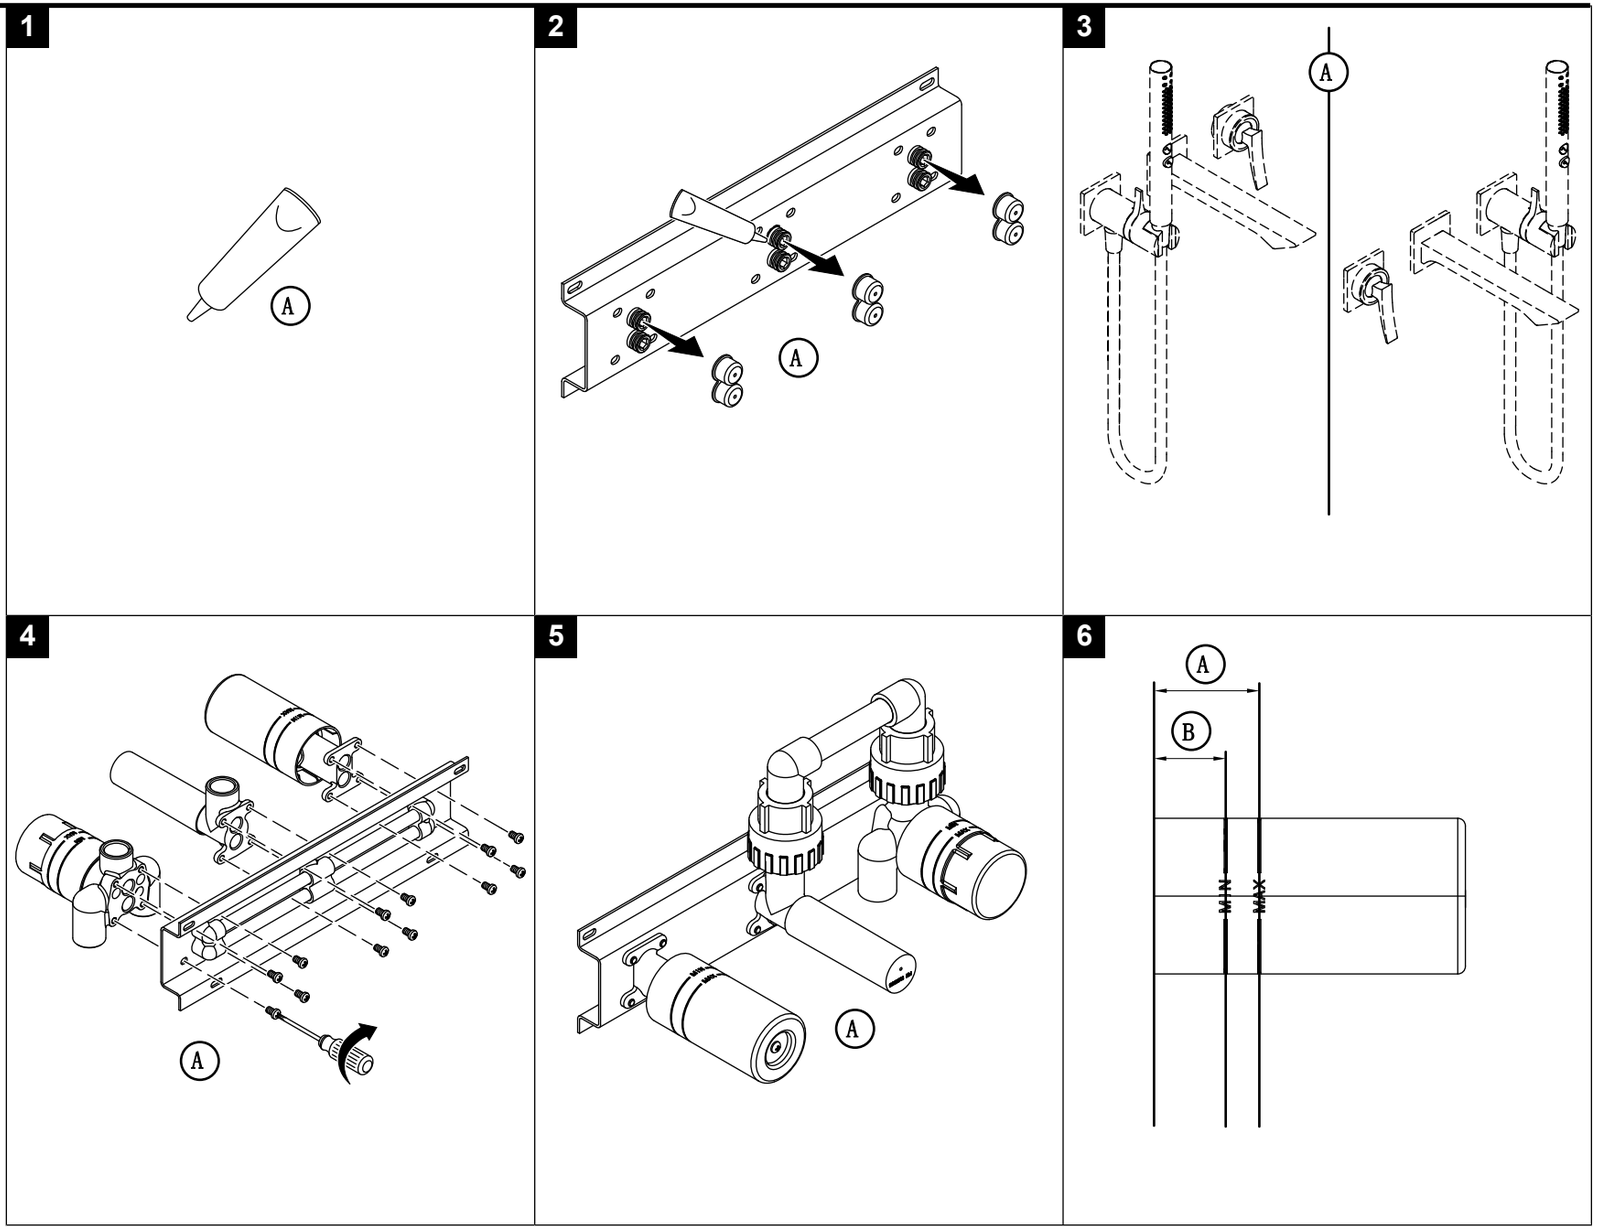

Follow all local plumbing and building codes.

This product should be used with the 3-hole wall-mount bath faucet.

Turn OFF the water supplies.

READ ALL INSTRUCTIONS BEFORE INSTALLATION

SAVE THESE INSTRUCTIONS

Required Tools and Materials:

1A. Grease

Installation Steps:

2A. Remove the protectors from the connectors. **Verify that the O-rings are in place on the connectors and coated with grease.**

3A. Determine the installation positions of the three assemblies on the mounting plate according to the user requirements to achieve six different exposed installation configurations. The illustration shows two of the installation configurations achieved when used with K-EX40834T-4 (sold separately). **Note: Carefully determine the installation positions of these three assemblies. Once the wall is finished, their positions cannot be changed.**

4A. Install the three assemblies onto the mounting plate and tighten the screws.

5A. Connect the assemblies using PPR pipes (not provided). Verify that all connections are properly sealed and leak-free.

6A. Maximum distance to the finished wall.

6B. Minimum distance to the finished wall.

7A. Hot supply.

7B. Cold supply.

8A. Ensure only to apply the water pressure test on the product. Empty the air in the pipe and faucet thoroughly before the test. Ensure the test pressure is below 0.8 MPa (8 bar) and the test duration is within 30 minutes.

9A. Use a level to verify that the product is level.


10A. Complete the finished wall. Verify that the opening in the finished wall does not exceed 2-3/16" (56 mm) in diameter.

Need help? Contact our Customer Care Center.


- Mainland China: +(86) 800-820-2628, +(86) 400-820-2628
- **Care and cleaning:** kohler.com.cn/support/care-and-cleaning/

This product is covered under the **Five-Year Limited Warranty for KOHLER® Faucets**, found in the packed Compliance Certification.


7

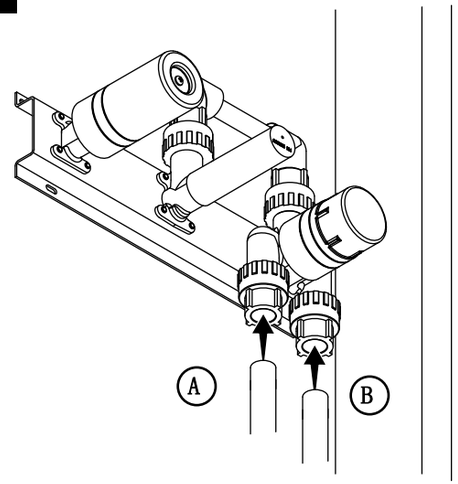


8

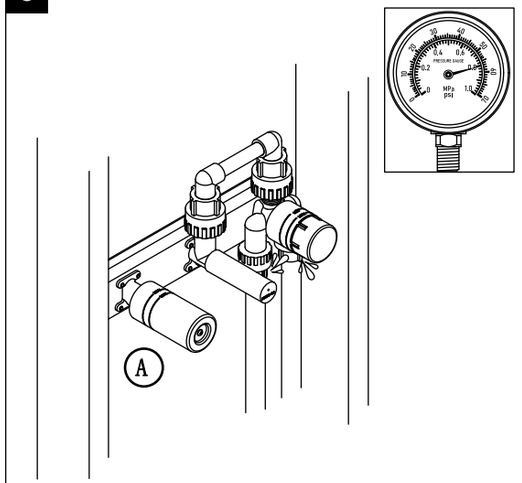

9

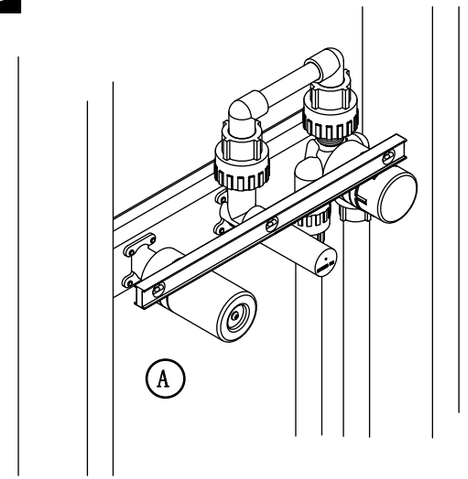

10

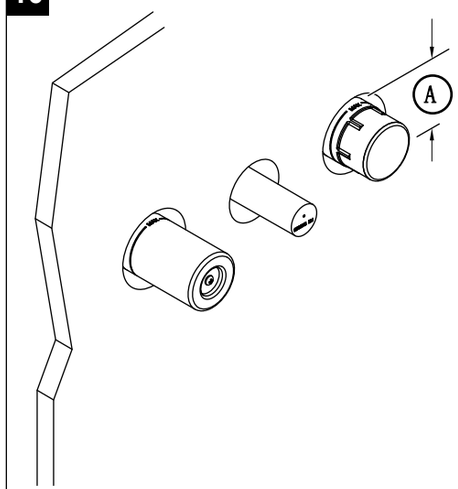

©2026 Kohler Co.