


3. Install the Sink

A. Self-rimming Installation


- Apply silicone or rubber sealant along the back rim of the sink.
- Place the sink into the cut area(as shown).

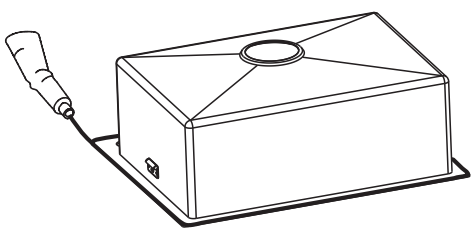

- Put an heavy object on or inside the sink to make the sink edges level with the countertop. Remove the object when the sealant completely dries after 24 hours.
- Wipe away excessive sealant with dry cloth.
- Make sure there is no gap left.

B. Undercounter Installation

- Apply a bead of silicone sealant or rubber sealant around the inner rim of the sink.
- Reverse the countertop and fix the sink to the countertop bottom with clips or other fastener.

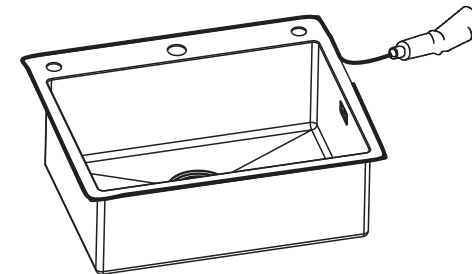

- Use a dry cloth to wipe away any excess sealant.
- Verify that there are no gaps.
- Allow the sealant to cure for at least 30 minutes.
- Reverse the countertop back and fix into the cabinet.

4. Connect Water Supply and Test

- Install the garbage disposal, if used, according to the manufacturer's instructions.
- Connect and tighten the trap to the strainer, and complete the water supply connections to the faucet according to the instructions packed with the faucet.
- Run water into the sink and check for leaks.

CARE AND CLEANING

Stainless Steel

Rinse your stainless steel sink thoroughly after each use, and use a dabbing action to dry with a clean, soft cloth. Clean stainless steel once a week.

Always apply stainless steel cleaner/polish with a nonabrasive cloth or sponge, working with, not across the grain. Do not use steel wool, wire brushes or abrasive pads to clean your sink.

If you use cleaners containing chlorides, be sure to rinse the surface immediately after you clean it to avoid corrosion. Do not allow cleaners to remain in contact with the sink surface for long periods of time.


Kohler kitchen sink accessories, including bottom basin racks, wire rinse baskets, cutting boards and colanders will help protect the surface of your sink.

If the surface becomes excessively dirty, consider using baking soda, or a general purpose cleaner.

3. 安装水槽

A. 台上安装


- 沿水槽平边下边缘均匀涂抹优质硅胶或橡胶密封胶。
- 将水槽置入切割区域。

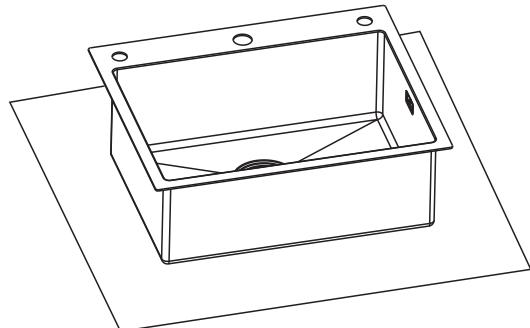

- 找一重物压在水槽台面上或者盆内,使水槽边缘和台面间四边平整接触。待24小时后密封胶完全凝固后可移除重物。
- 用一块干布擦掉任何多余的密封胶。
- 确认没有任何缝隙。

B. 台下安装

- 沿水槽边缘靠近内缘处涂抹硅胶或橡胶密封胶。
- 将台面倒置,使用安装夹或其它固定件将水槽固定于台面底部。

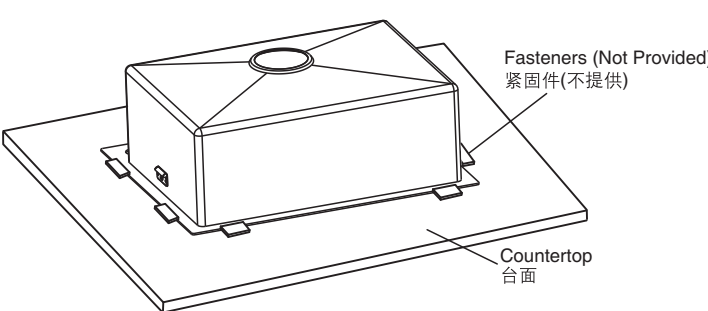

- 用一块干布,擦掉任何多余的密封胶。
- 确认没有任何缝隙。
- 让密封胶凝固至少三十分钟时间。
- 将台面翻转安装至底柜上。

4. 连接供水及测试

- 如果使用垃圾处理器的话,根据生产商指示,安装垃圾处理器。
- 连接并拧紧下水器和下水管,根据龙头所附的指示完成通往龙头的供水连接。

- 将水注入水槽,检查是否漏水。

保养和清洁指南

不锈钢

每次使用后,请彻底冲洗您的不锈钢水槽,并使用清洁的软布将其擦干。对于不锈钢用品,请每周清洗一次。

请使用非磨蚀性的布或海绵,并用不锈钢专用清洁剂/光亮剂进行清洗,而不要使用带颗粒的清洁剂。请不要使用铜丝球、钢丝刷或者研磨性的抹布清洁不锈钢水槽。

如果您使用了含有氯化物的清洁剂,在您清洁水槽之后,确保立即对水槽表面进行冲洗,以防止腐蚀。不要让清洁剂在您的水槽表面停留过长时间。

科勒厨房水槽附件,包括底部盆架、金属丝冲洗篮、砧板和沥水篮均有助于保护您的水槽表面。

如果水槽表面很脏,使用碳酸氢钠,或普通的清洁剂进行清洗。