



K-30842T-G-0/K-32009T-G-0


产品尺寸图 (单位：毫米)

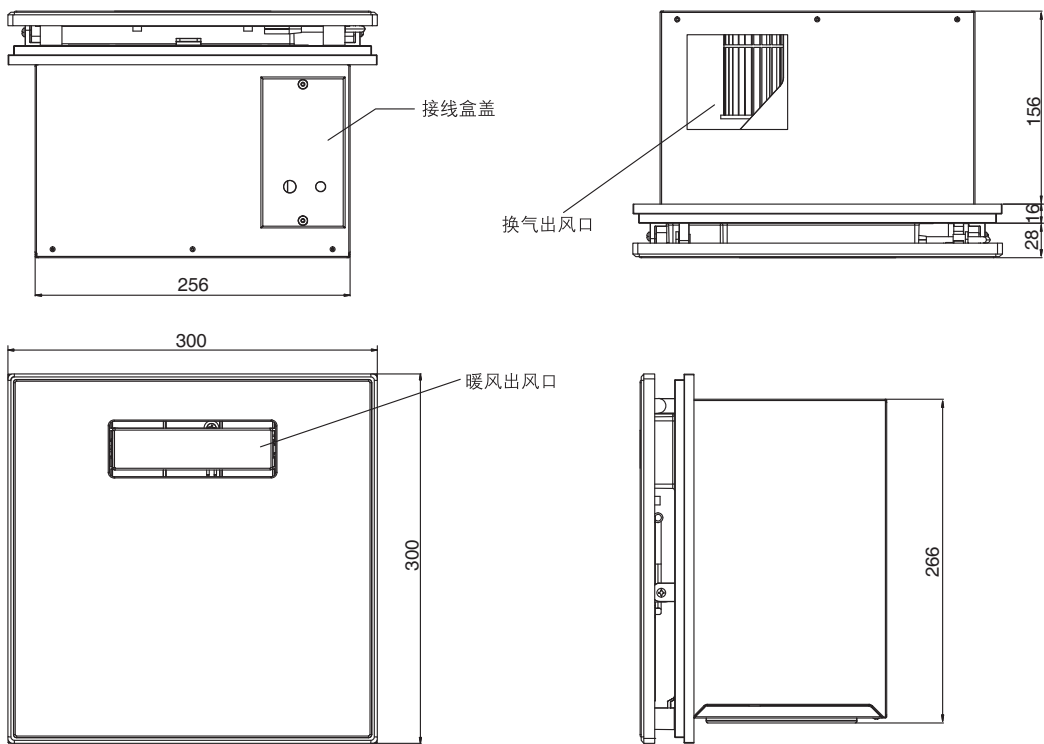


墙装开关尺寸图









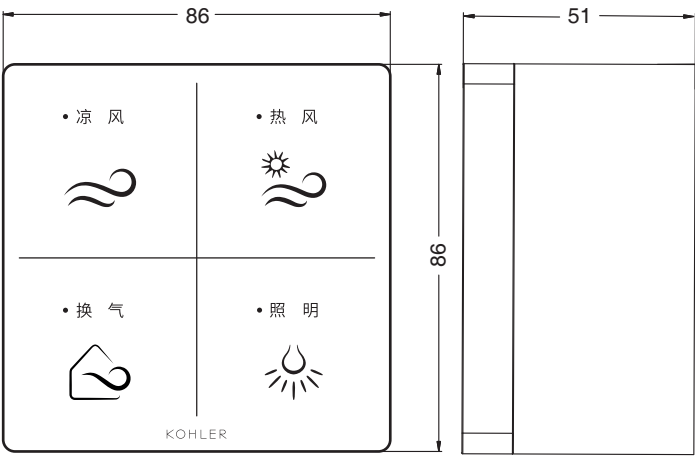


型号	K-30842T-G-0/K-32009T-G-0
电压/频率	220V~/50Hz
额定输入功率	2150W
热风功率	2133W
凉风功率	30W
换气功率	30W
照明功率	17W
换气风量	2.2m³/min
换气噪音	43dB
防护等级	IPX2 (浴霸)
	IPX4 (墙装开关)

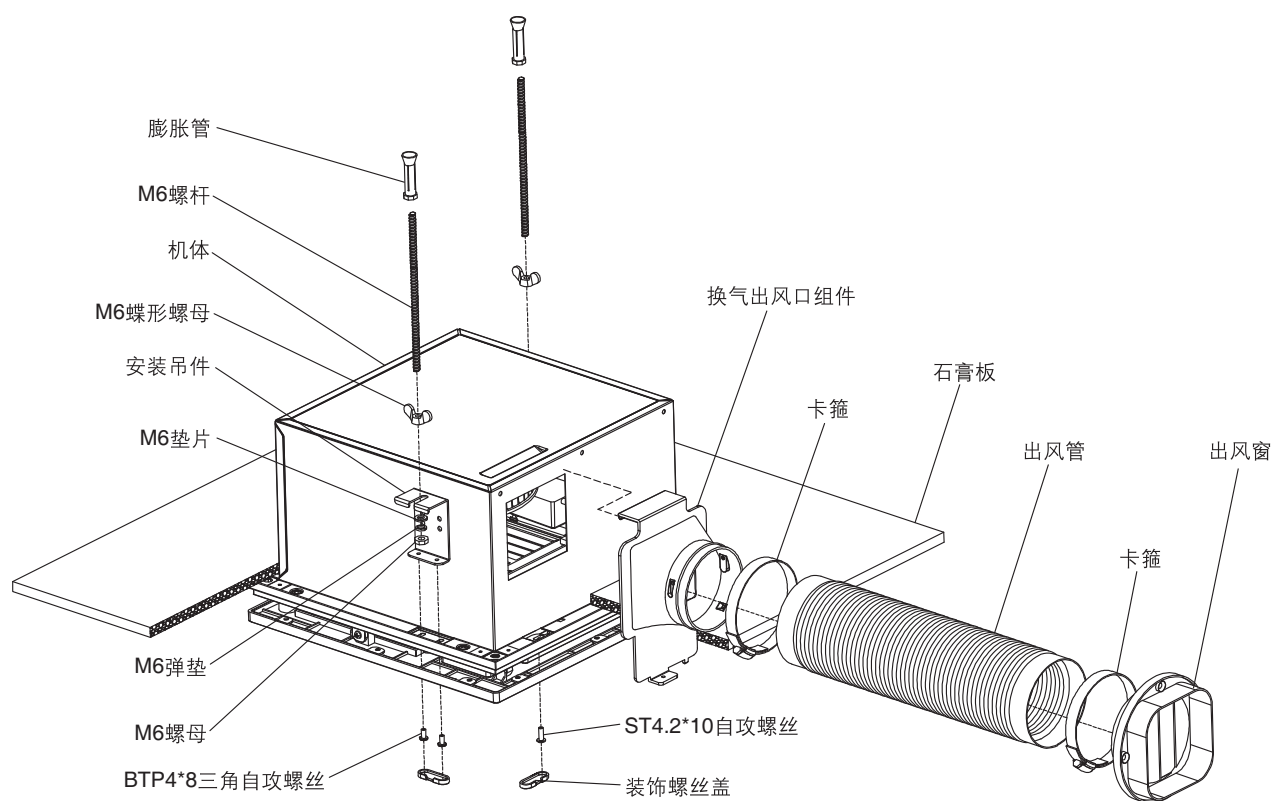

注：石膏吊顶或其它吊顶的开孔尺寸： $275^{+5}_0 \times 275^{+5}_0$ (mm)

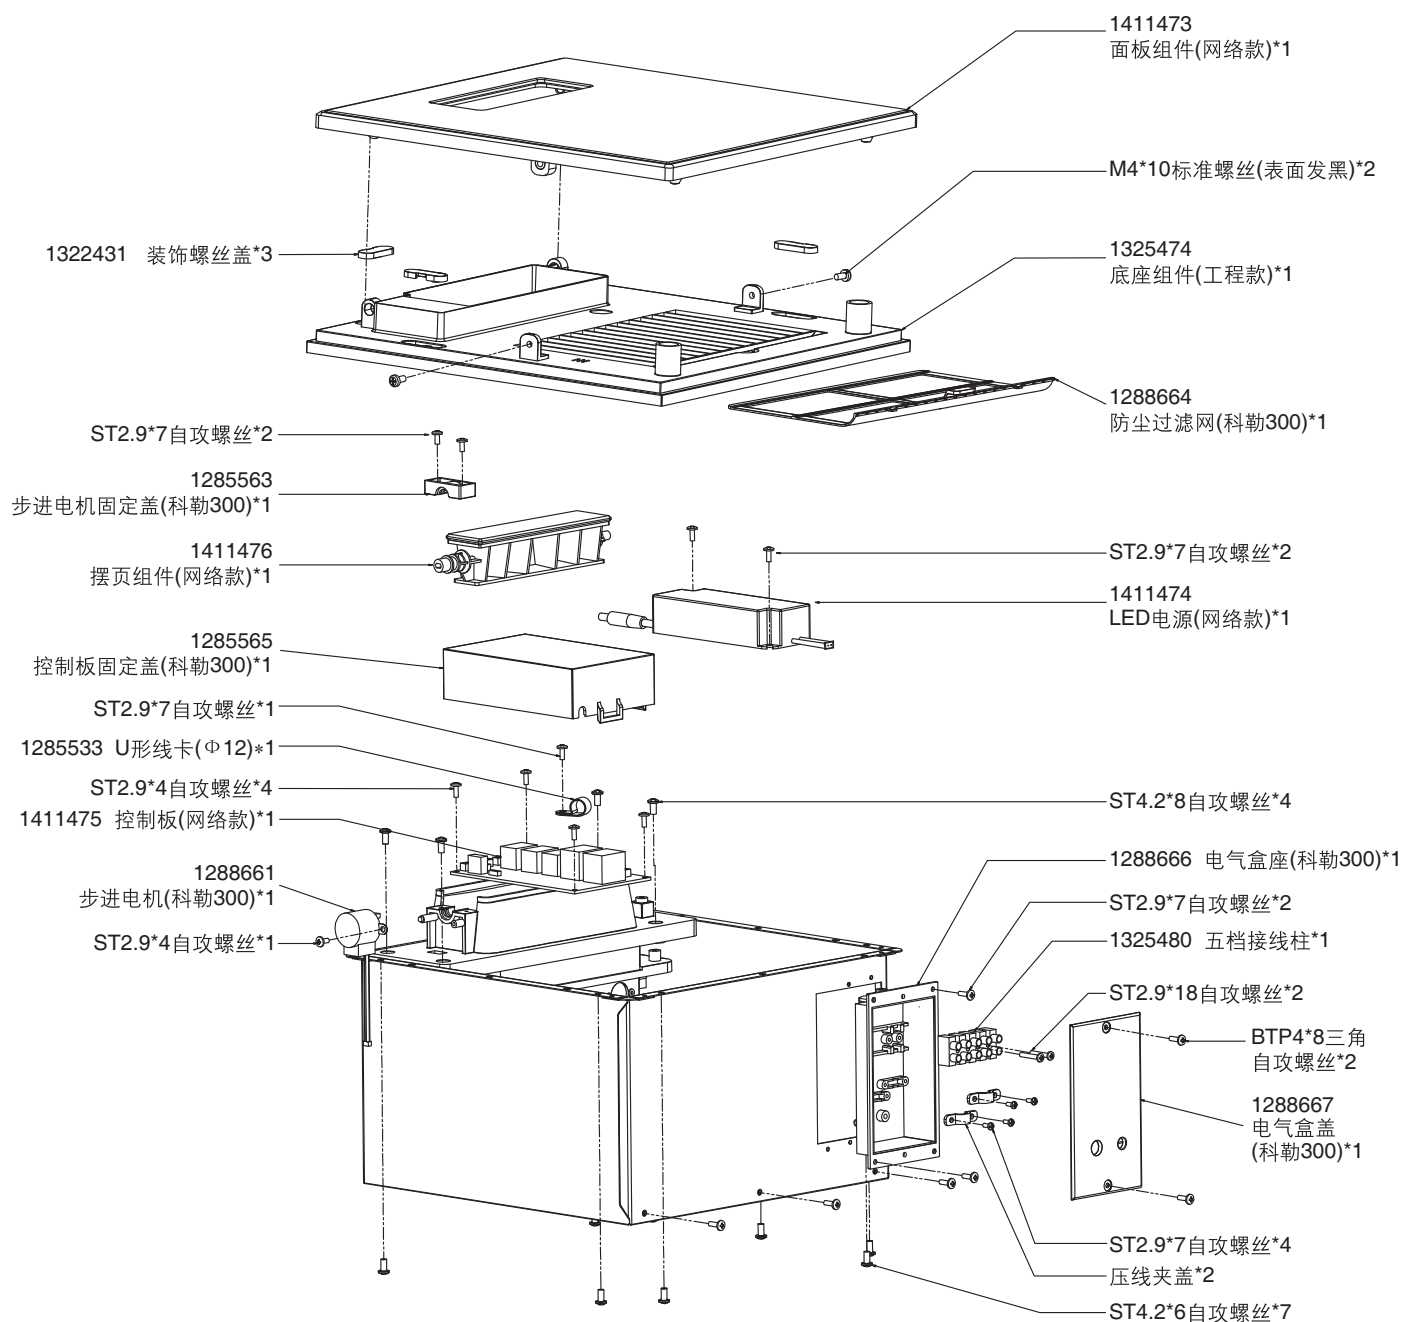

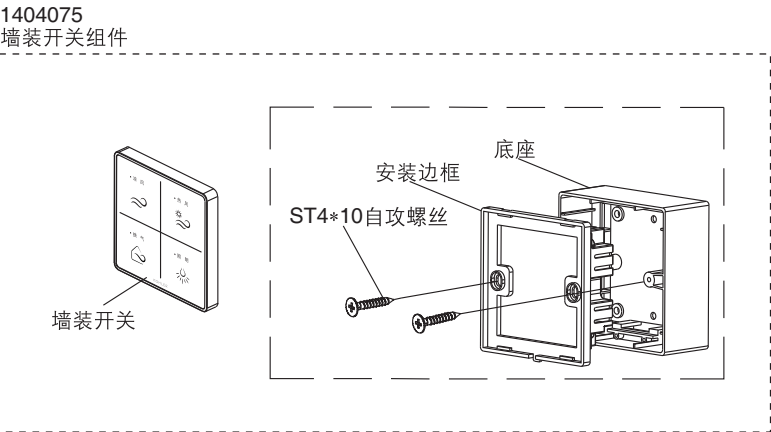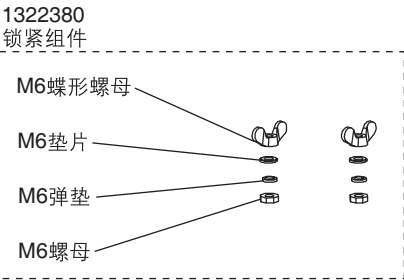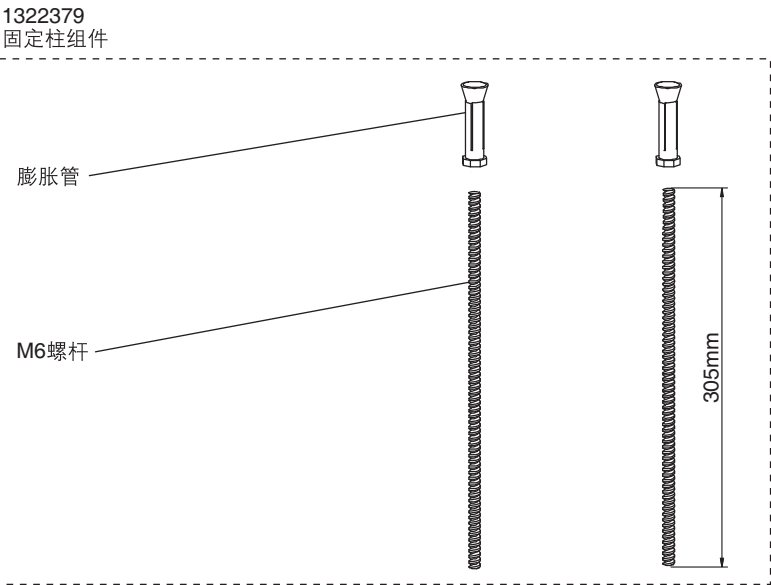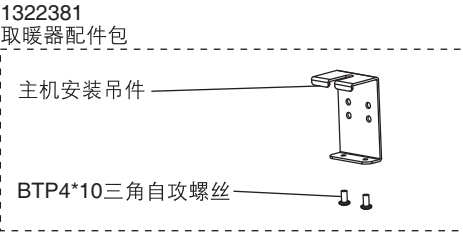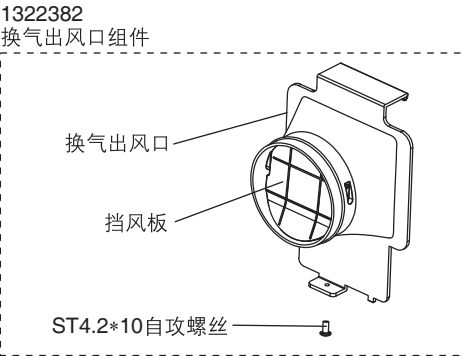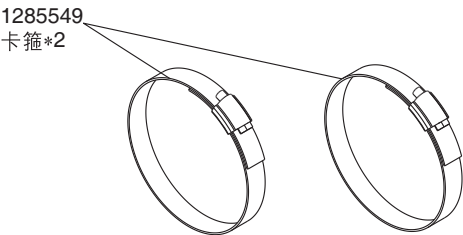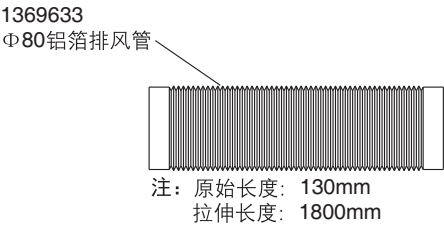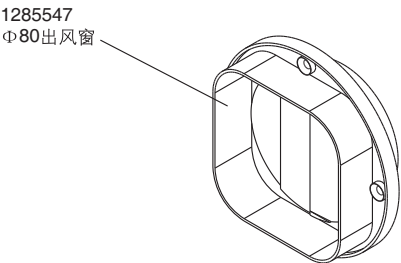



1285562
自攻螺丝组件

描述	单位	数量
ST2.9*7 自攻螺丝(表面发黑)	Pcs	9
BTP2.9*8 三角自攻螺丝	Pcs	2
ST2.9*18 自攻螺丝	Pcs	2
ST4.2*8 自攻螺丝	Pcs	4
ST2.9*4 自攻螺丝	Pcs	5
M4*10 标准螺丝(表面发黑)	Pcs	2
ST4.2*6 自攻螺丝(表面发黑)	Pcs	13