



K-77317T-X-0

产品尺寸图 (单位: 毫米)

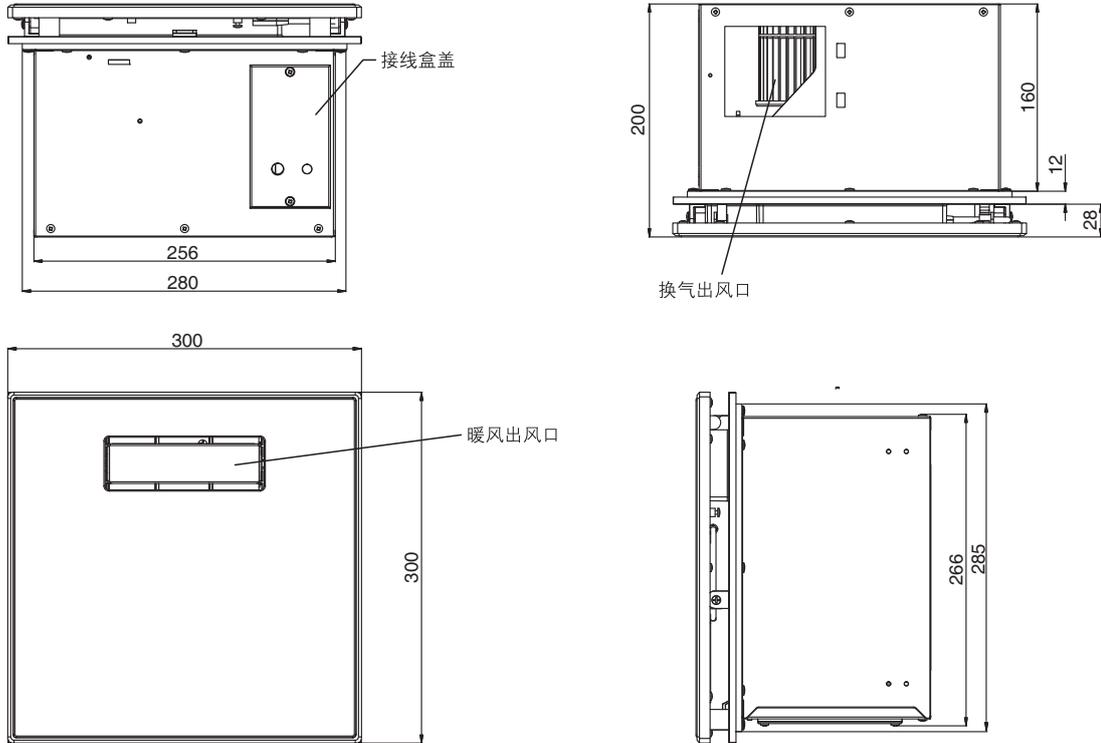


遥控器尺寸图

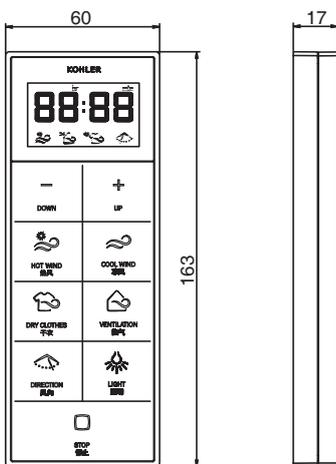


名称	科勒浴霸
型号	K-77317T-X-0
电压/频率	220V~/50Hz
额定输入功率	2150W
热风功率	2133W
凉风功率	30W
干燥功率	2130W(热干燥)/30W(凉干燥)
换气功率	30W
照明功率	17W
换气风量	2.2m ³ /min
换气噪音	43dB
防护等级	IPX2 (浴霸) IPX4 (遥控器)


电气参数要求

K-77317T-X-0	220V~/50Hz, 2150W, 3 × 1.5mm ² 电源线
--------------	---

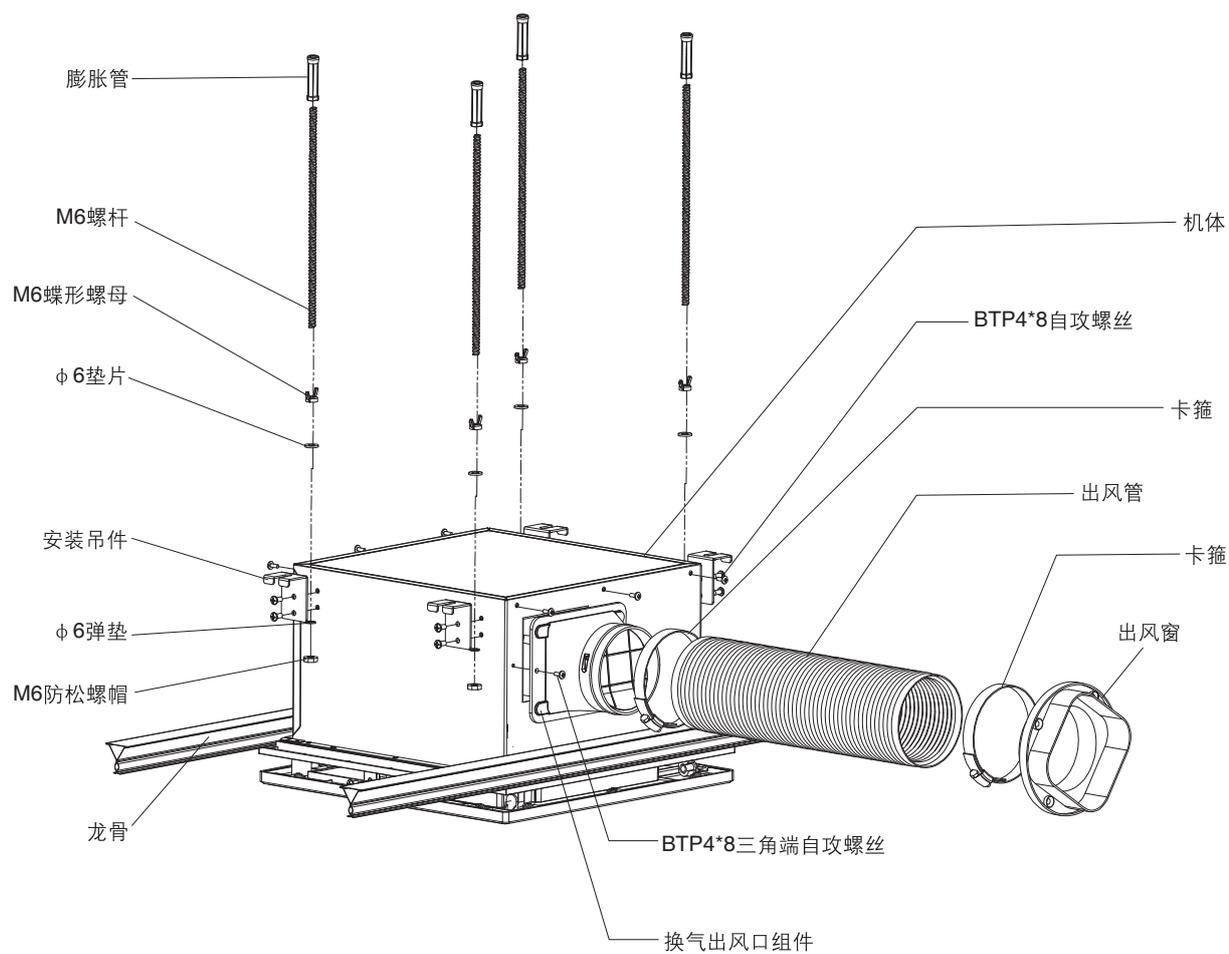


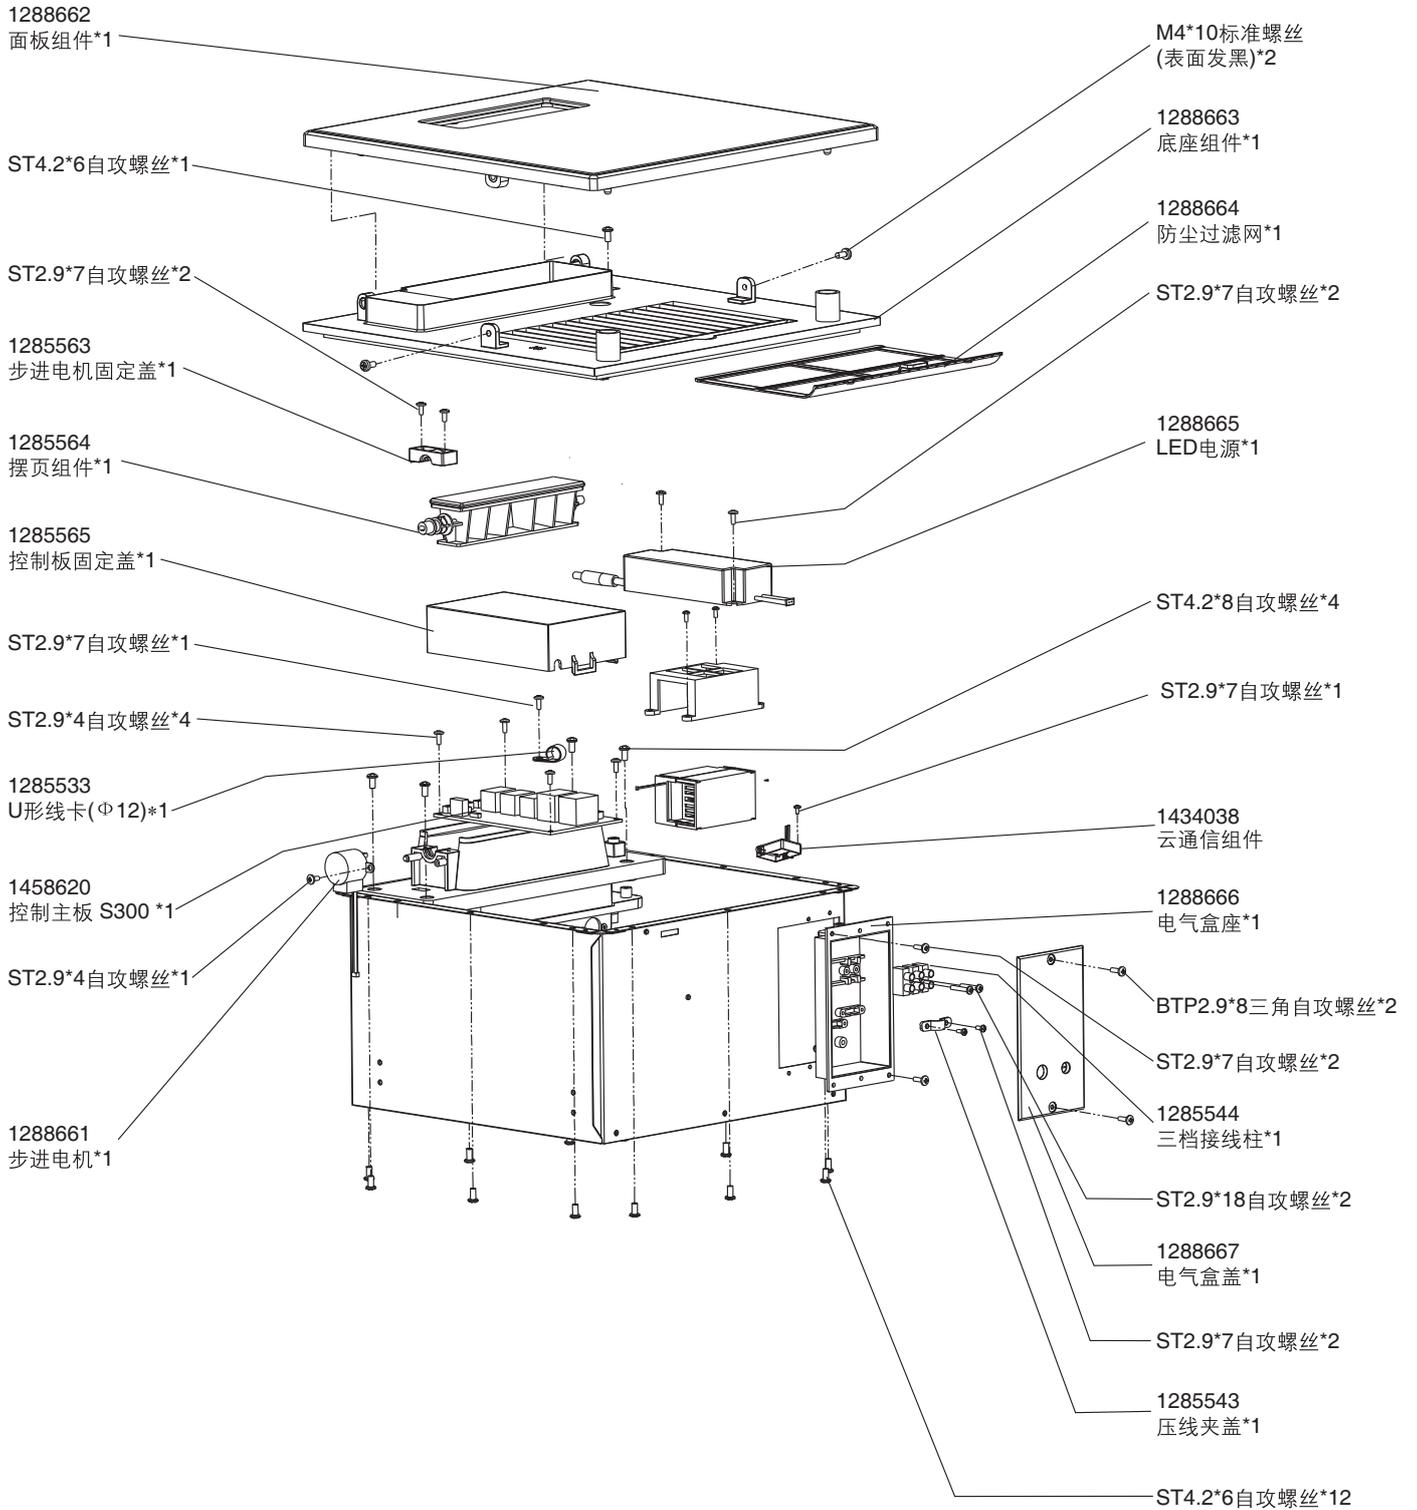

1285547
Φ80出风窗




1285548
Φ80排风管




注：原始长度：275mm
拉伸长度：1300mm

1285549
卡箍*2




1285550
换气出风口组件


BTP4*8 三角自攻螺丝




1285551
取暖器配件包

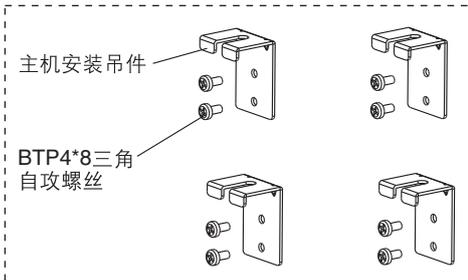


1285552
固定柱组件

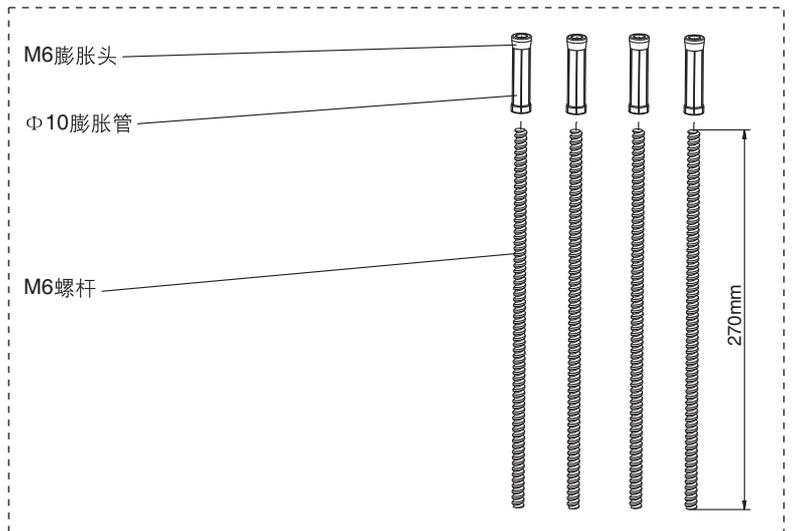


1285553
锁紧组件

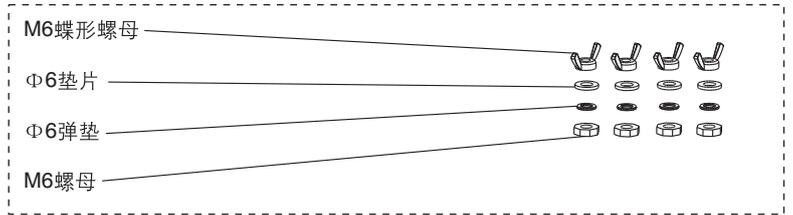

1285556
遥控器底座组件

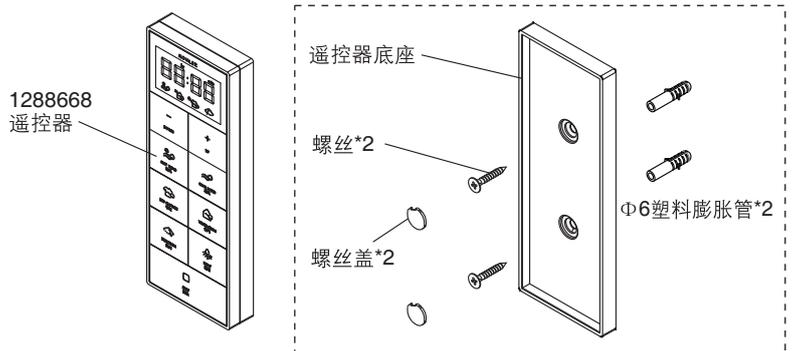

1288669
安装模板



1345819
AC250V 16A
电源保险管

1345820
AC250V 6A
主板保险管

1285560
自攻螺丝组件

描述	单位	数量
ST2.9*7 自攻螺丝(表面发黑)	Pcs	11
BTP2.9*8 三角自攻螺丝	Pcs	2
ST2.9*18 自攻螺丝	Pcs	2
ST4.2*8 自攻螺丝	Pcs	4
ST2.9*4 自攻螺丝	Pcs	5
M4*10 标准螺丝(表面发黑)	Pcs	2
ST4.2*6 自攻螺丝(表面发黑)	Pcs	13