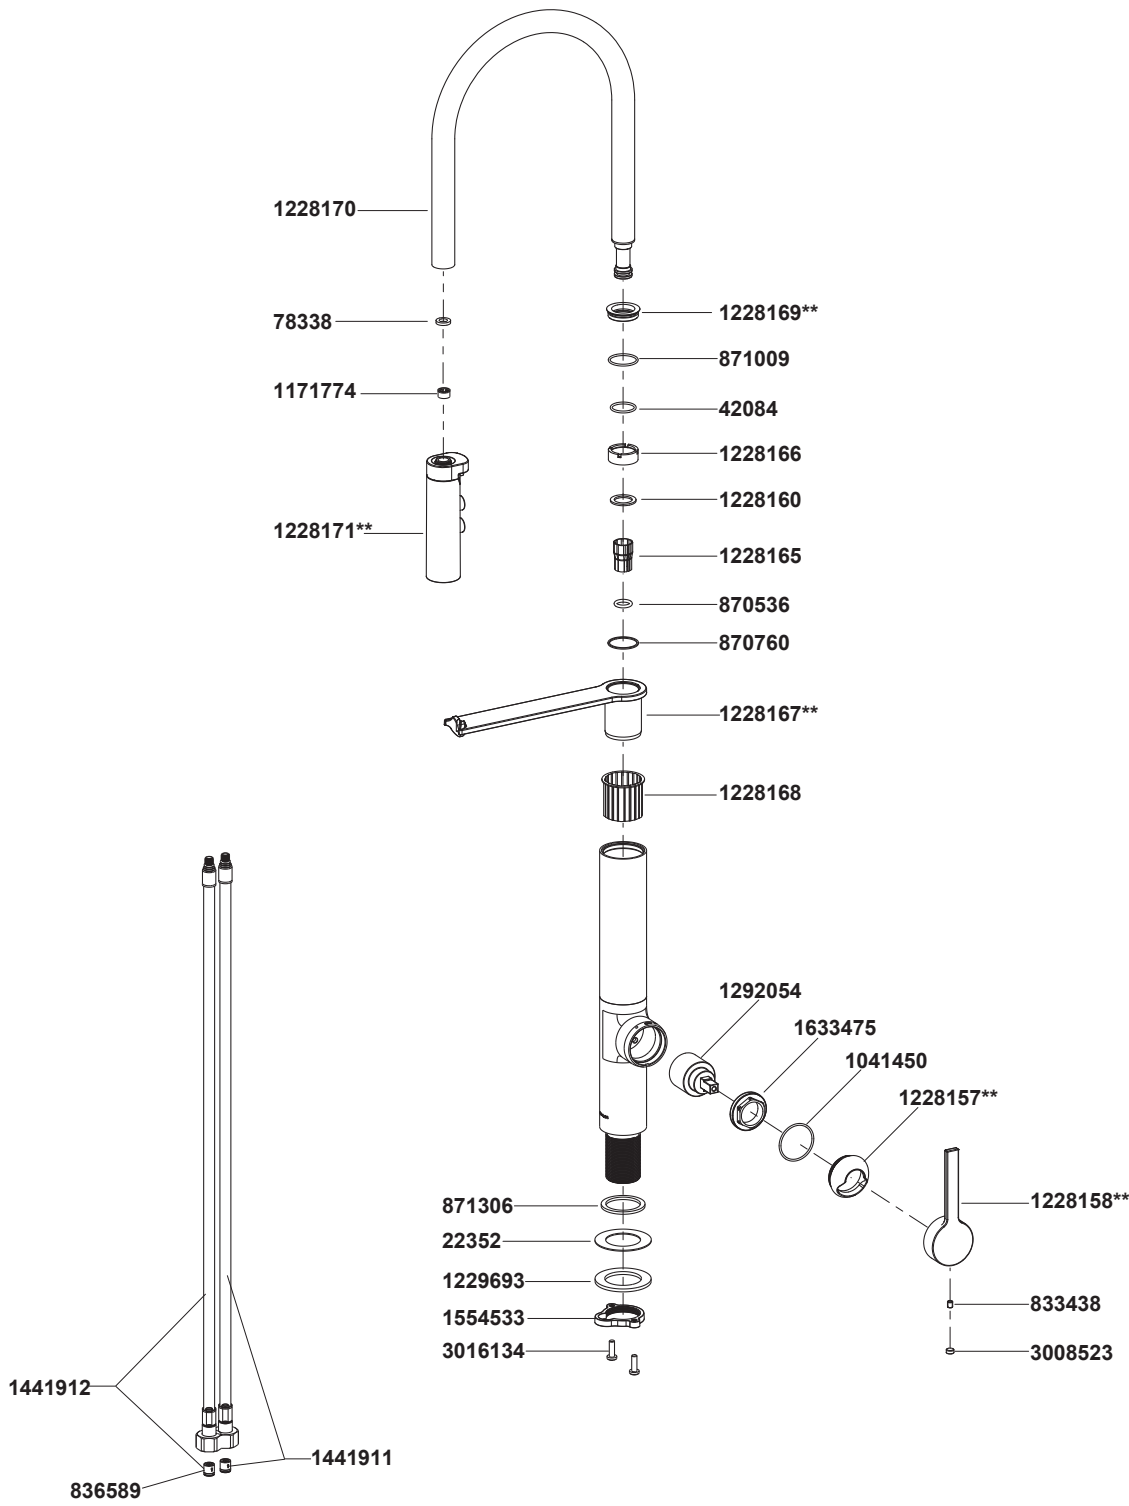


99887T-4 厨房龙头



**订购时请说明颜色编号
**Color code must be specified when ordering

99887T-4 厨房龙头

安装之前

所有的资料是按最新出版的产品资料编写而成。科勒公司保留任何时候不经通知即可改变产品特性、包装或产品可供类型的权利。

说明书包括重要的安装、保养及清洁方面的内容，请把这些资料交给用户阅读。

注意事项：

- 一定要先彻底冲洗供水管以清除管道中的杂质。
- 如果是安装新的洗涤盆，可将龙头先装到洗涤盆上。
- 花洒最高工作压力：0.5MPa(5bar)。水压超过0.5MPa(5bar)时必须安装减压阀。花洒最高工作温度及环境温度：60℃。请特别注意花洒同花洒连接的臂管须远离加热器，否则可能损坏花洒及其密封件，甚至对使用者造成伤害。
- 水嘴加施的水效标识表明本产品的水效等级等性能符合GB25501-2019《水嘴水效限定值及水效等级》的要求，是产品符合性的一种标识。

BEFORE YOU BEGIN

All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

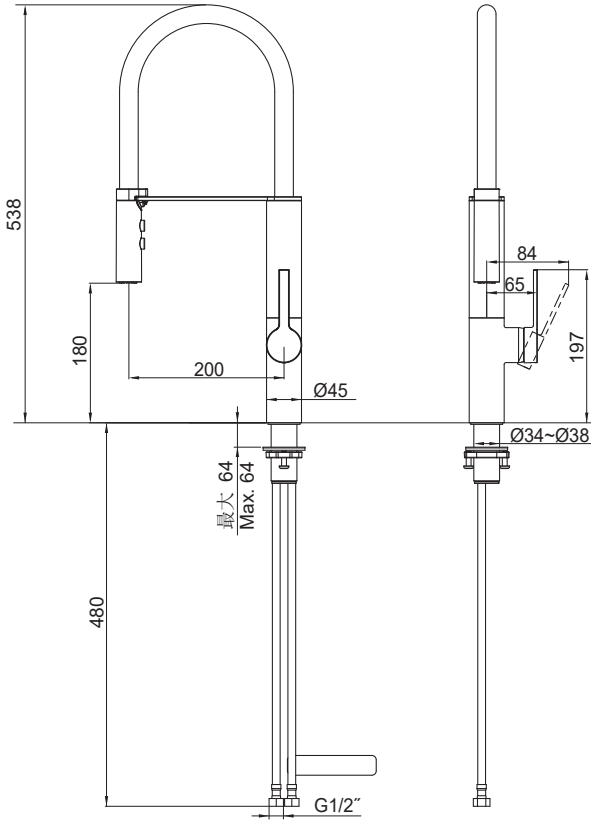
Please leave these instructions for the consumer. They contain important information.



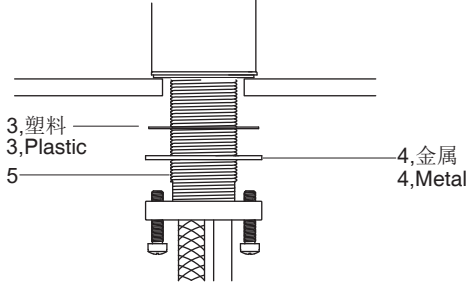

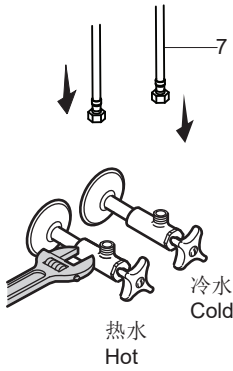
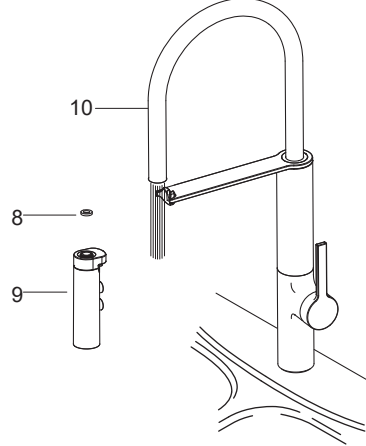
NOTES:

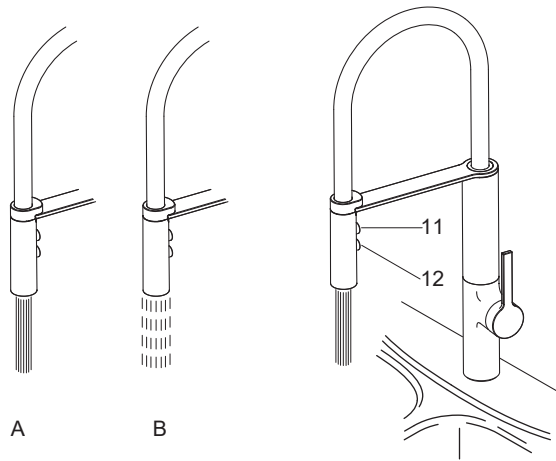
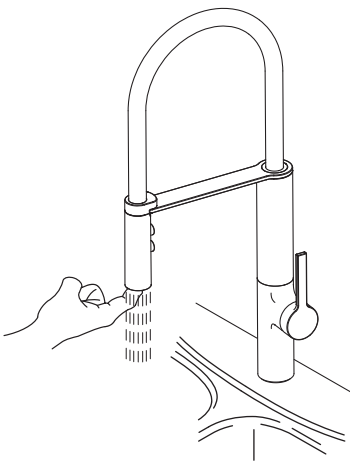
- Flush the water supply pipes thoroughly to remove debris.
- For new installations, install the faucet to sink before installing.
- The highest working pressure for spray is 0.5MPa (5bar). If it exceeds 0.5MPa(5bar), a pressure reducer is needed. The highest water and environment temperature is 60℃. Please keep spray away from heater, or it may become damaged and cause injury to the user.
- The water efficiency label applied to the faucet indicates that the water efficiency grade and other performance of the product meet the requirements of GB 25501-2019 "Minimum Allowable Values of Water Efficiency and Water Efficiency Grades for Faucets" which is a marking of product conformity.

安装尺寸

ROUGH-IN DIMENSIONS



安装步骤	INSTALLATION
 <p>1. 安装水龙头，把手置于右边。 1. Install the faucet(the handle is on the right side).</p>	 <p>2. 将螺钉(1)旋进安装环(2)。 2. Partially thread the screws(1) into the ring(2).</p>
 <p>3. 将垫片(3, 4)安装到牙管(5)上，安装环旋到牙管上。 3. Slide the washers(3, 4) onto the shank(5) and thread the ring onto the shank.</p>	 <p>4. 调整安装环上螺钉的位置并拧紧。 4. Tighten the screws to fix the faucet.</p>
 <p>5. 将软管(7)连接到水源上。蓝色编织丝的软管连接冷水。 5. Connect the hoses(7) to water supplies. The blue hose should be connected to cold water supply.</p>	 <p>6. 请拧下花洒(9)和垫片(8)。打开水源。打开龙头把手使冷热水流出约一分钟以清除杂质。把垫片和花洒重新装回到软管(10)上，调整软管并把花洒挂到支架上。 检查并确保所有衔接处都已拧紧，确保手柄在关闭位置。打开主水源和排水系统，检查并修理有漏水的接口。 6. Unscrew the spray(9) and washer(8). Turn on the water supplies. While rotating the handle, flush the hot and cold water for about one minute. Reinstall the spray and washer into the hose(10), adjust the hose and make spray hook in the positon of bracket. Ensure all coupling nuts are tight. Ensure the lever handle is in the off position. Check for leaks. Repair as needed.</p>

使用说明	HANDLE OPERATION
 <p>轻轻打开手柄，顺时针转为冷水，逆时针转为热水。水流初始状态为A，按下按钮(12)，得到水流B；按住按钮(11)，暂停水流，松开按钮得到水流A。</p> <p>龙头维护： 打开龙头，揉搓喷嘴以清除杂质。</p>	 <p>Turn on the handle gently. Turn clockwise for cold water, turn counter-clockwise for hot water. The original water flow is as figure A shown. Click the button(12), the water flow is as figure B shown; Press the button(11) to suspend the water, release the button for figure A.</p> <p>Faucet Maintenance: With the water running, rub the nozzles to dislodge debris.</p>
<p>清洗说明</p> <p>适用于所有加工处理过的表面：以中性肥皂水清洗镀层表面，再以干净的软布彻底擦干整个表面，许多清洁剂，比如氨水、去污粉及洁厕灵等，会对电镀表面造成伤害，切忌使用。</p> <p>有磨损性的清洁用具或清洁剂也不可适用于科勒牌的水龙头及其配件上。</p>	<p>CLEANING INSTRUCTIONS</p> <p>All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc. which could adversely affect the finish and are not recommended for cleaning.</p> <p>Do not use abrasive cleaners or solvents on Kohler faucets and fittings.</p> <p>龙头本体背面标有“LEAD FREE”字样，即产品符合美国AB1953法令的要求。</p> <p>"LEAD FREE" is marked on the back of the faucet signifying its compliance with the United States AB1953.</p>