


76602T-4 单把梳洗脸盆龙头

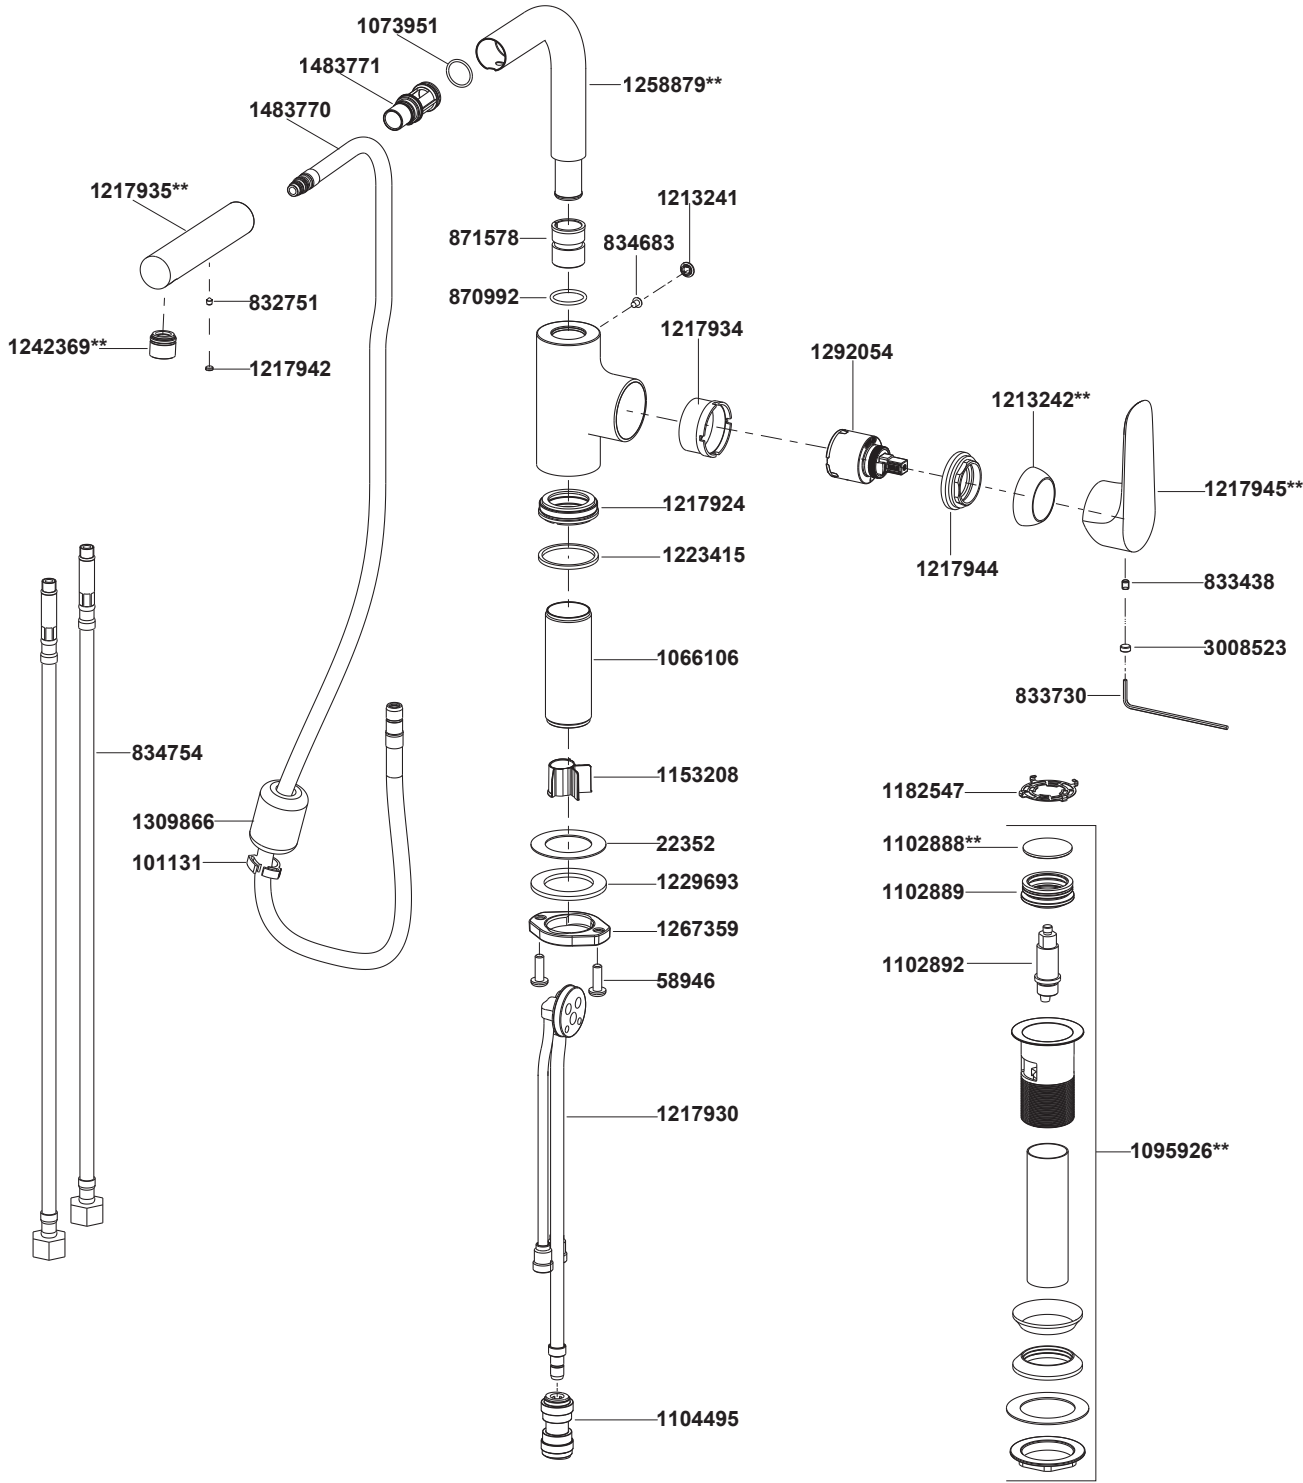

**订购时请说明颜色编号
**Color code must be specified when ordering

76602T-4 单把梳洗脸盆龙头

安装之前

所有的资料是按最新出版的产品资料编写而成。科勒公司保留任何时候不经通知即可改变产品特性、包装或产品可供类型的权利。

说明书包括重要的安装、保养及清洁方面的内容，请把这些资料交给用户阅读。

注意事项：

1. 一定要先彻底冲洗供水管以清除管道中的杂质。
2. 如果是安装新脸盆，可将水龙头先装到脸盆上。
3. 花洒最高工作压力为：0.5MPa(5bar)。水压超过0.5MPa(5bar)时须安装减压阀。花洒最高工作温度及环境温度：60°C。请特别注意花洒须远离浴霸，否则可能损坏花洒及其密封件，甚至对使用者造成伤害。

BEFORE YOU BEGIN

All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.


Please leave these instructions for the consumer. They contain important information.


NOTE:

1. Flush the water supply pipes thoroughly to remove debris.
2. For new installations, assemble the faucet to lavatory before installing.
3. The highest working pressure for spray is 0.5MPa (5bar). If it exceeds 0.5MPa(5bar), a pressure reducer is needed. The highest water and environment temperature is 60°C. Please keep the spray away from heater, or it may become damaged and cause injury to the user.

安装尺寸

ROUGH-IN DIMENSIONS

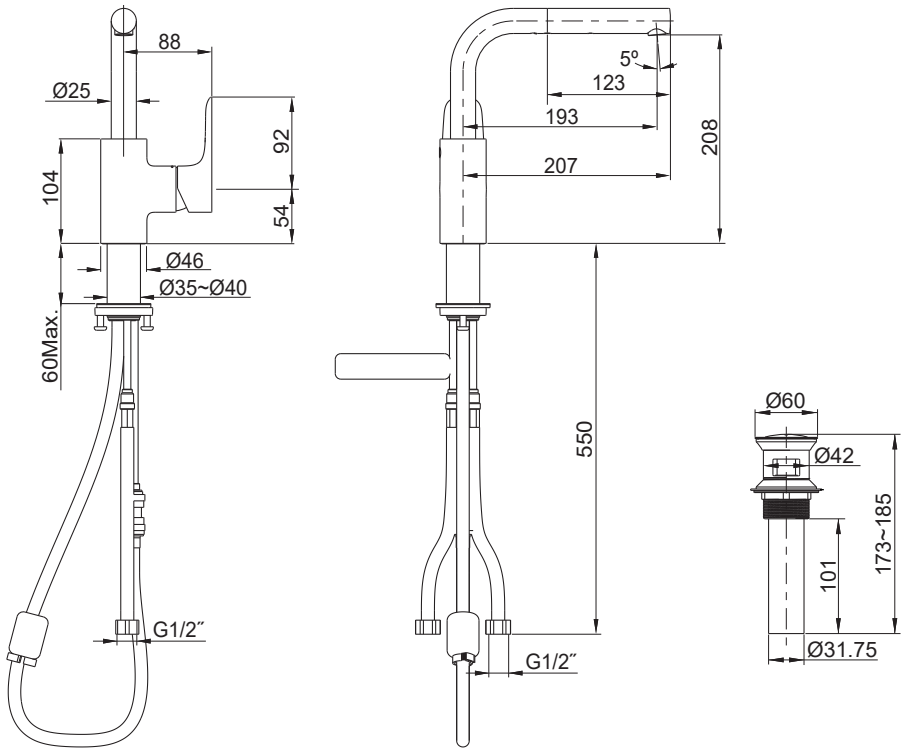

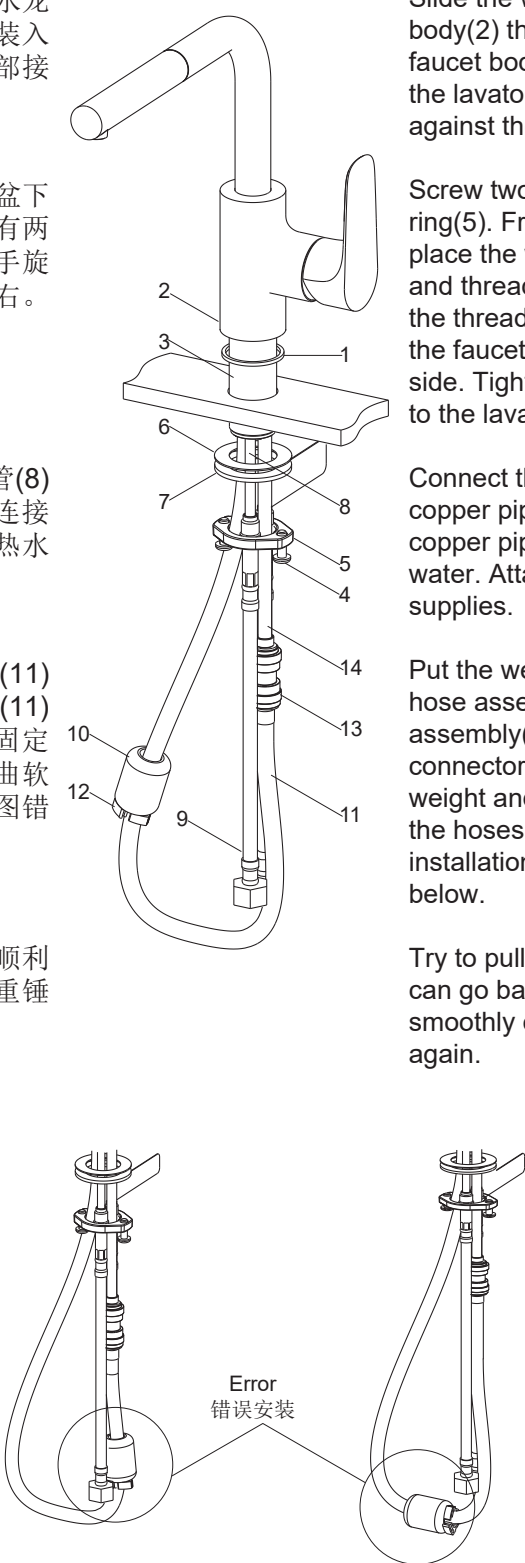使用说明	HANDLE OPERATION
轻轻打开手柄，顺时针旋转为冷水，逆时针旋转为热水。	Open the handle gently. Turn clockwise for cold water, counter-clockwise for hot water.
安装步骤	INSTALLATION
如何安装水龙头 首先，将垫片(1)穿过牙管(3)嵌入到水龙头本体(2)底部的槽中。将本体组件装入脸盆的安装孔中。使龙头本体的底部接触台面。 将两个螺钉(4)旋入固定环(5)。从脸盆下方依次把垫片(6)、金属垫片(7)及装有两个螺钉的固定环装到牙管上，并用手旋紧。调整水龙头的位置使得把手朝右。锁紧两螺钉，将龙头固定在脸盆上。 把进水软管(9)分别接到两个短的铜管(8)上，与贴有“COLD”标签的铜管连接的软管接冷水。再将软管连接到冷热水源上。 将重锤(10)和卡扣(12)装到软管组件(11)上，通过转换接头(13)连接软管组件(11)与铜管(14)。将卡扣和重锤移动并固定在合适的位置。注意：不要过份扭曲软管。请避免将重锤和卡扣安装到下图错误的位置。 试着抽出花洒，检查花洒是否可以顺利回归原位。如果不可以，重新调整重锤的位置。	How to Install the Faucet Slide the washer(1) into the groove of the body(2) through the shank(3). Put the faucet body kit into the mounting hole of the lavatory. Let the bottom of the body against the deck. Screw two screws(4) into the threaded ring(5). From underside of the lavatory, place the washer(6), the metal washer(7) and threaded ring onto the shank, tighten the threaded ring with two screws. Position the faucet so that the handle is on the right side. Tighten two screws to secure faucet to the lavatory. Connect the hoses(9) with the two shorter copper pipes(8). The hose which connects copper pipe with “COLD” label is for cold water. Attach the hoses(9) to water supplies. Put the weight(10) and clip(12) onto the hose assembly(11). Connect the hose assembly(11) and copper pipe(14) with connector(13). Adjust and position the weight and clip. NOTE: Don't over distort the hoses. Please avoid the wrong installation for the weight and clip as below. Try to pull out the spray, check whether it can go back to its original position smoothly or not. If not, position the weight again.
	

如何安装排水器	How to Install the Drain
首先把锁紧螺母(15)、塑料垫片(16)、橡胶垫圈(17)和尾管(19)从排水本体上依次取下。在尾管螺纹处须缠绕足以密封的密封胶带或涂合适的密封胶，装回排水本体。 把排水本体从脸盆上部孔插入。再依次将橡胶垫圈(小面朝上)、塑料垫片和锁紧螺母从排水本体底部装入。将锁紧螺母锁紧。注意：在锁紧螺母拧紧后，不可调整排水本体的位置，否则会破坏油灰密封或密封剂密封。 注意：如果需要，可直接在排水器盘片(20)底面沿周围涂一圈密封油灰或其他密封剂，而不使用橡胶垫片(18)。	Remove the locknut(15), plastic washer (16), rubber gasket(17) and tailpiece(19) from the drain body. Supply enough tape or sealant to tailpiece thread. Reinstall the tailpiece. Insert the drain body into the lavatory. Put the rubber gasket (Tapered side up), plastic washer and locknut back to the drain body in turn. Tighten the clocknut. NOTE: Do not reposition the drain after the locknut is tightened, or you may break the putty or sealant seal. NOTE: If needed, apply a ring of plumbers putty or other sealants around the underside of the drain flange(20), instead of using rubber washer(18).
如何清理排水器	How to Clean the Drain
逆时针旋下止水塞(23)，取出并清理止水垫(22)和滤网垫片(21)。 重新装回滤网垫片、止水垫和止水塞。	Turn counter-clockwise the stopper(23). Remove and clear the washer(22) and filter washer(21). Reinstall the filter washer, washer and stopper.
安装结果检查	INSTALLATION CHECKOUT
检查并确保所有衔接处都已拧紧，确保手柄在关的位置。打开主水源和排水系统，检查并修理有漏水的接口。 将起泡器(24)取下。打开龙头，让水流约一分钟以清除杂质。冲洗起泡器。关水龙头，重新装回起泡器。	Ensure that all coupling nuts are tight. Ensure that the lever handle is in the off position. Turn on the main water supply and drain, and check for leaks. Repair as needed. Remove the aerator(24). Turn on the faucet, run hot and cold water for about one minute to remove any debris. Remove any debris from the aerator. Shut off the faucet. Reinstall the aerator.
清洗说明	CLEANING INSTRUCTIONS
适用于所有加工处理过的表面：以中性肥皂水清洗镀层表面，再以干净软布彻底擦干整个表面，许多清洁剂比如氨水、去污粉及洁厕灵等，会对电镀表面造成伤害，切忌使用。 有磨损性的清洁用具或清洁剂也不可使用于科勒牌的水龙头及其配件上。	All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc. which could adversely affect the finish and are not recommended for cleaning. Do not use abrasive cleaners or solvents on Kohler faucets and fittings.