

1684652-T2

记录您的型号：
Record your model number:_____

警告： 存在烫伤风险。水温过高会导致严重灼伤。将阀芯水温设置为等于或低于 120°F (49°C)。请参阅阀芯的温度调节说明。

小心： 存在产品损坏和人身伤害风险。产品应远离加热器。

注意：本产品的最高工作压力为 0.5 MPa (5 bar)。如果压力超过 0.5 MPa (5 bar)，请安装减压阀。

重要信息! 淋浴器加施的水效标识表明本产品的水效等级等性能符合 GB 28378-2019《淋浴器水效限定值及水效等级》 的要求，是产品符合性的一种标识。

您的产品可能与所示图片效果有所不同，安装步骤相同。

请遵守当地管路安装及建筑条例。

本产品需与 3 孔墙出水浴缸龙头阀芯 K-41432T-NA 搭配使用。

确保安装此产品之前，3 孔墙出水浴缸龙头阀芯 K-41432T-NA 已安装完毕。

关闭供水系统。

在安装或使用本产品之前阅读所有说明。

请保存说明书。

所需工具和材料：

1A. 2.5 mm 六角扳手

安装步骤：

2A. 墙壁装修好后，去掉阀芯 K-41432T-NA 上的保护套。

3A. 冲洗热水和冷水供水管道 1 分钟以去除杂质。

4A. 安装套筒和装饰罩，直至与墙面接触。

5A. 用 2.5 mm 六角扳手旋松把手底部螺钉。将把手手柄朝下安装到阀柄上。锁紧螺钉。

6A. 将盖子穿过把手手柄扣紧到套筒上，带红色标志在左侧。

7A. 用 2.5 mm 六角扳手旋松出水口底部螺钉。将出水口出口朝下安装到接头上，使其紧贴墙面。锁紧螺钉。**注意：**不要划伤接头上的 O 型圈。

8A. 滑动装饰罩到花洒托架上，将带有装饰罩的花洒托架安装在阀芯上，直至装饰罩与墙面接触。将 O 型圈放在固定接头上，用扳手锁紧接头。

9A. 根据需要，将限流器装入手持花洒进水口。

10A. 打开供水管，检查渗漏。

11A. 阀芯处于关闭位置时，安装完毕状态如图所示。

保养：

12A. 打开供水管，按压或摩擦手持花洒出水嘴，去除杂质或水垢。

13A. 定期冲洗滤网垫圈，去除杂质。

15A. 打开水龙头，去除杂质。

15B. 装回起泡器，确认起泡器完全拧紧。

使用说明：

16A. 将龙头把手轻轻提起，浴缸出水口出水，顺时针旋转为热水，逆时针旋转为冷水。

16B. 顺时针旋转花洒把手，旋转至 90 度时手持花洒出混合水，旋转至 180 度时手持花洒出热水。

16C. 按下相应手持花洒上的按键，切换至所需的出水模式。

需要帮助？ 请联系我们的客户服务中心。

- 中国大陆：+(86) 800-820-2628, +(86) 400-820-2628
- **保养和清洁：** kohler.com.cn/support/care-and-cleaning/

本产品支持**科勒®水龙头五年有限担保**，详见包装所附的《合格证》。

WARNING: Risk of scalding. High water temperature can cause severe burns. Set the valve water temperature at or below 120°F (49°C). Refer to the temperature adjustment instructions for the valve.

CAUTION: Risk of product damage and personal injury. Keep the product away from a heater.

NOTE: The maximum operating pressure for this product is 0.5 MPa (5 bar). If the pressure exceeds 0.5 MPa (5 bar), install a pressure reducer.

IMPORTANT! The water efficiency label applied to the shower indicates that the water efficiency grade and other performance of the product meet the requirements of GB 28378-2019 "Minimum Allowable Values of Water Efficiency and Water Efficiency Grades for Showers" which is a marking of product conformity.

The product shown may differ from your actual product. The installation steps still apply.

Follow all local plumbing and building codes.

This product should be used with the 3-hole wall-mount bath faucet valve K-41432T-NA.

Install the 3-hole wall-mount bath faucet valve K-41432T-NA before installing this product.

Turn OFF the water supplies.

READ ALL INSTRUCTIONS BEFORE INSTALLATION

SAVE THESE INSTRUCTIONS

Required Tools and Materials:


1A. 2.5 mm Hex Wrench

Installation Steps:

2A. Remove the protectors from the valve K-41432T-NA after the wall is finished.

3A. Flush hot and cold water for 1 minute to remove any debris.

4A. Install the sleeve and escutcheon until they are against the finished wall.

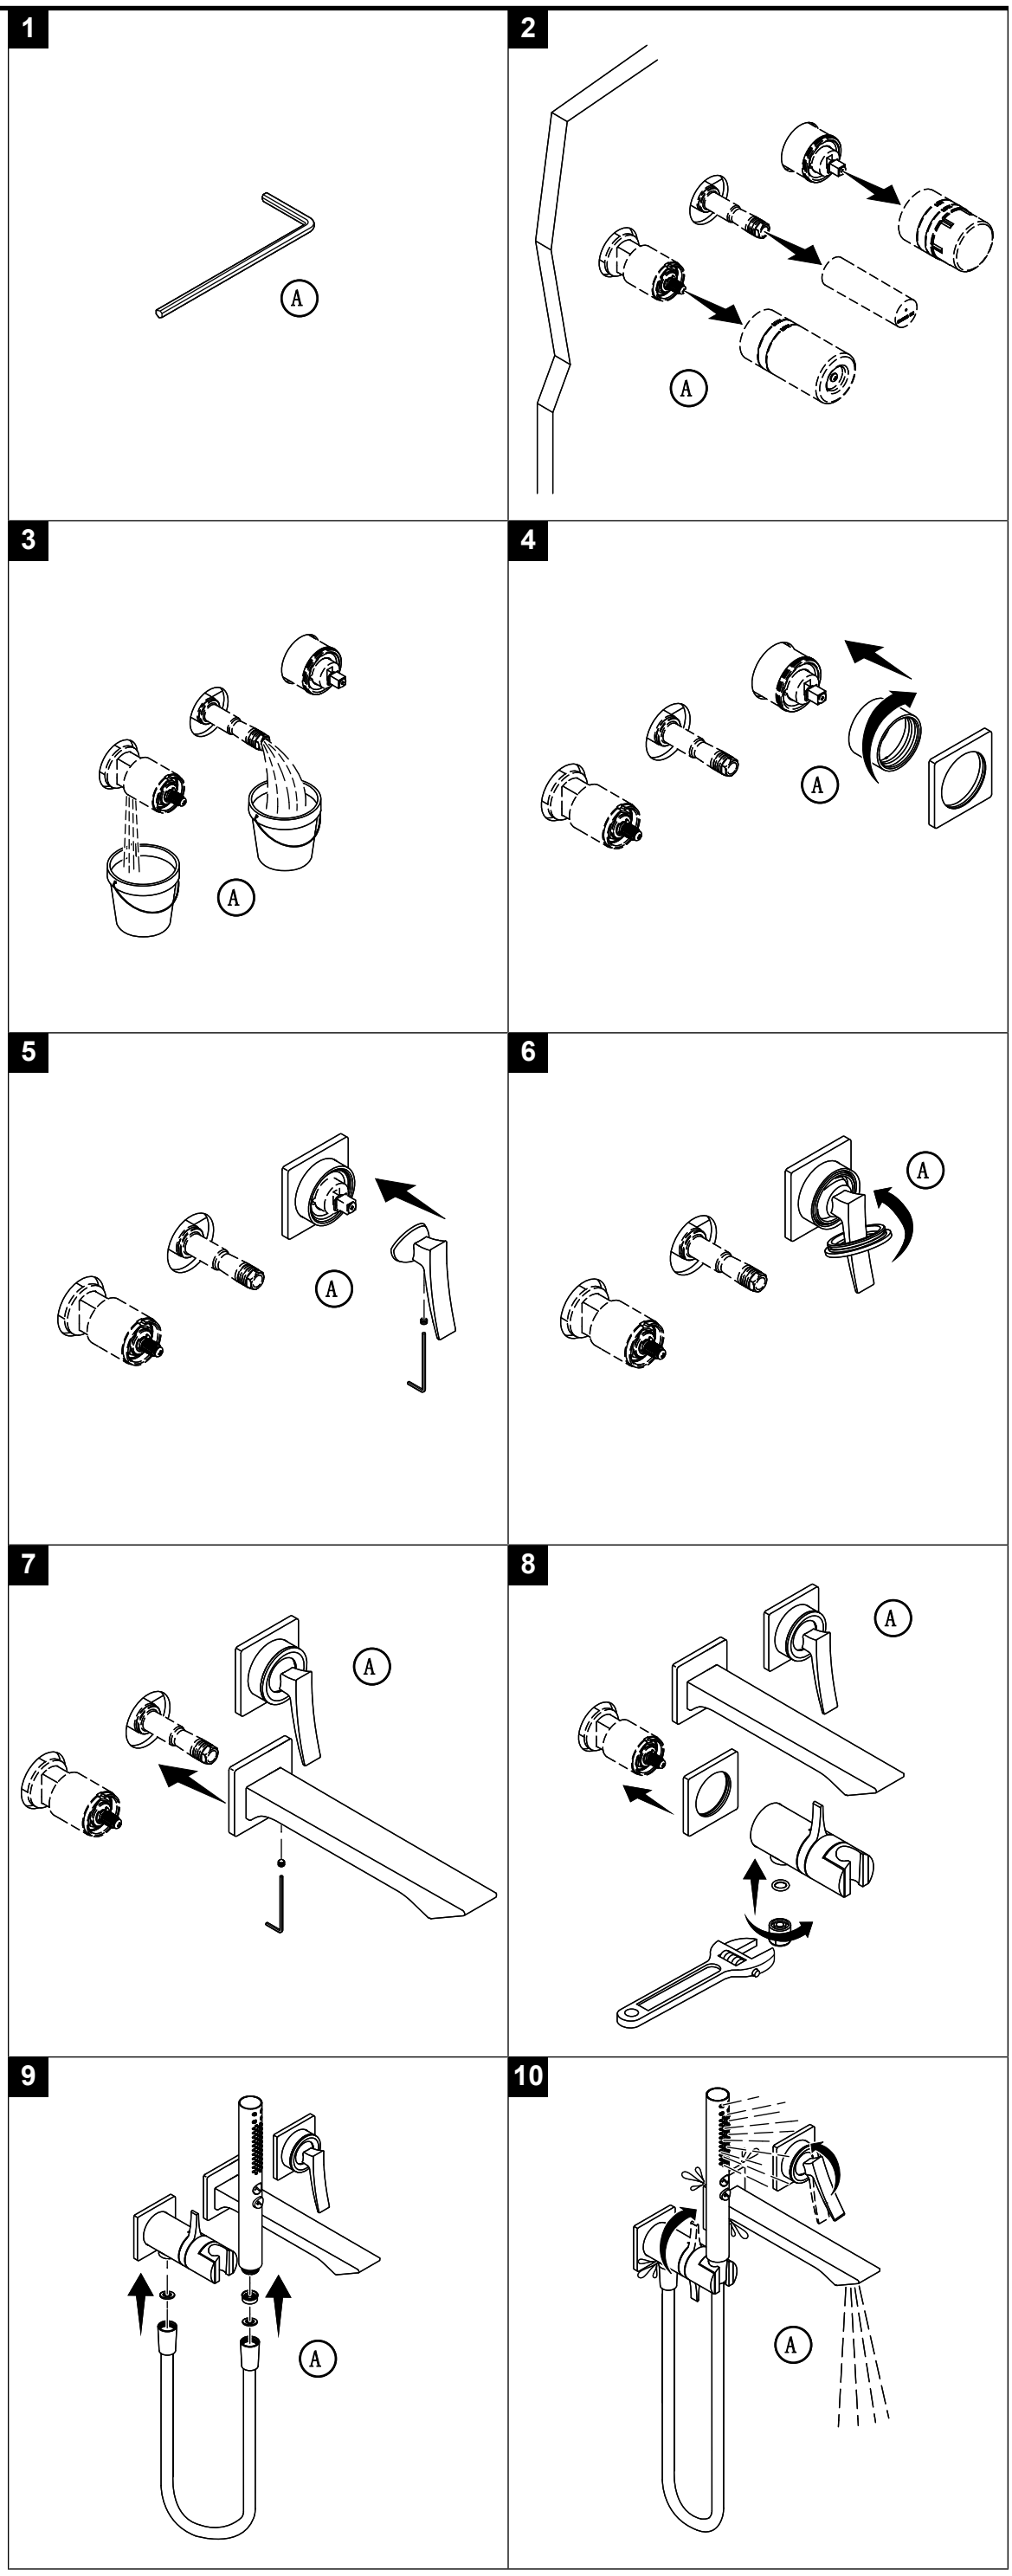

5A. Loosen the setscrew in the bottom of the handle with a 2.5 mm hex wrench. Install the handle onto the valve stem. Tighten the setscrew.

6A. Slide the cap through the handle and secure the cap onto the sleeve, with the red indicator on the left.

7A. Loosen the setscrew in the bottom of the spout with a 2.5 mm hex wrench. Install the spout onto the connector with the outlet facing downward until the spout is against the finished wall. Tighten the setscrew. **Note:** DO NOT damage the O-ring on the connector.

8A. Slide the escutcheon onto the shower holder. Install the shower holder with the escutcheon onto the valve until the escutcheon is against the finished wall. Put the O-ring into the connector, then tighten the connector with a wrench.

9A. If needed, install the flow restrictor into the handshower.

10A. Turn ON the water supplies and check for leaks.

11A. When the installation is completed, the correct position with the valve closed is as shown.

Maintenance:

12A. Periodically rub debris from the nozzles while water is running.

13A. Periodically rinse debris from the screen washer.

15A. Run water to flush debris.

15B. Reinstall the aerator and verify that the aerator is fully tightened.

Operation:

16A. Lift the faucet handle gently for bath spout. Turn clockwise for hot water, turn counter-clockwise for cold water.


16B. Rotate the handshower handle clockwise to 90 degrees for mixed water, rotate to 180 degrees for hot water.

16C. Press the corresponding button on the handshower to switch to the desired spray mode.

Need help? Contact our Customer Care Center.

- Mainland China: +(86) 800-820-2628, +(86) 400-820-2628
- **Care and cleaning:** kohler.com.cn/support/care-and-cleaning/

This product is covered under the **Five-Year Limited Warranty for KOHLER® Faucets**, found in the packed Compliance Certification.

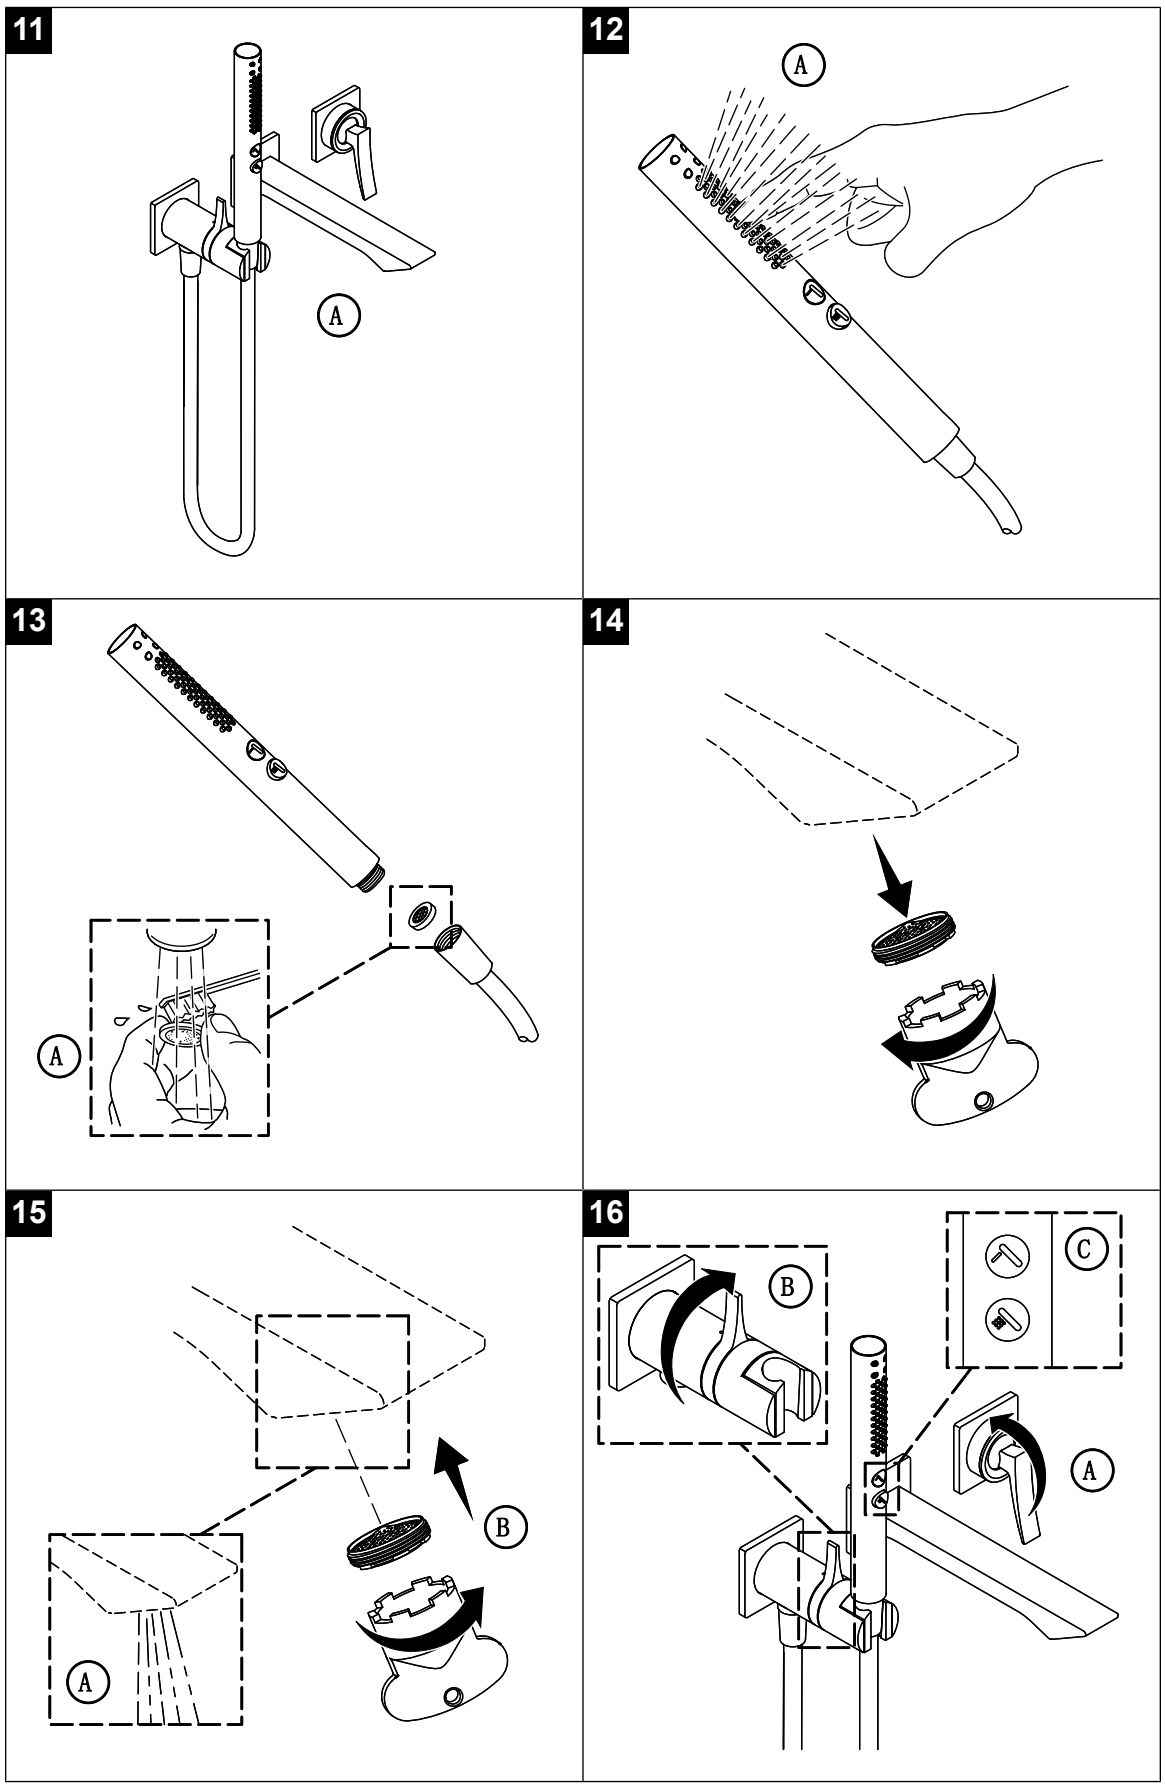

©2026 Kohler Co.