
KOHLER®

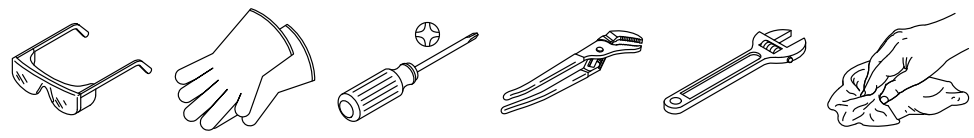

1665586-T2

记录您的型号：
Record your model number:_____

重要信息! 水嘴加施的水效标识表明本产品的水效等级等性能符合 GB 25501-2019《水嘴水效限定值及水效等级》 的要求，是产品符合性的一种标识。

您的产品可能与所示图片效果有所不同，安装步骤相同。

请遵守当地管路安装及建筑条例。

本产品需与双把墙出水脸盆龙头阀芯 K-31141T-NA 搭配使用。

确保安装此产品之前，双把墙出水脸盆龙头阀芯 K-31141T-NA 已安装完毕。

关闭供水系统。

在安装或使用本产品之前阅读所有说明。

请保存说明书。

所需工具和材料：

1A. 管道油灰。

1B. 2 mm 和 2.5 mm 六角扳手

安装步骤：

2A. 墙壁装修好后，去掉阀芯 K-31141T-NA 上的保护套。

3A. 用工具旋紧连接件到阀体上并贴紧墙壁。

4A. 将齿套安装到阀芯上，锁紧螺钉。

5A. 用 2 mm 六角扳手旋松把手组件底部螺钉。确保阀芯处于关闭状态，将把手组件安装到连接件上。**注意：**带红色标记在左侧。锁紧螺钉。

6A. 请确认 O 形圈已安装在接头上。

6B. 用活动扳手将接头旋紧到阀体上。**注意：**不要过份拧紧。

7A. 打开供水管，检查渗漏。

8A. 用 2.5 mm 六角扳手旋松出水口底部螺钉。将出水口出口朝下安装到接头上，使其紧贴墙面。锁紧螺钉。**注意：**不要划伤接头上的 O 型圈。

9A. 阀芯处于关闭位置时，出水口和把手安装完毕状态如图所示。

10A. 拆卸排水器。

11A. 如果需要，在法兰盘底部涂管道油灰，而不使用橡胶垫片。

12A. 安装橡胶垫圈和塑料垫片。

12B. 将螺母旋到排水本体上，并用扳手拧紧。

13A. 去除多余油灰。

13B. 完成排水组件的安装。

13C. 测试止水塞能否正常使用。

15A. 打开水龙头，去除杂质。装回起泡器，确认起泡器完全拧紧。

需要帮助？ 请联系我们的客户服务中心。

- 中国大陆：+(86) 800-820-2628, +(86) 400-820-2628
- **保养和清洁：** kohler.com.cn/support/care-and-cleaning/

本产品支持**科勒®水龙头五年有限担保**，详见包装所附的《合格证》。

IMPORTANT! The water efficiency label applied to the faucet indicates that the water efficiency grade and other performance of the product meet the requirements of GB 25501-2019 "Minimum Allowable Values of Water Efficiency and Water Efficiency Grades for Faucets" which is a marking of product conformity.

The product shown may differ from your actual product. The installation steps still apply.

Follow all local plumbing and building codes.

This product should be used with the wall-mount bathroom faucet valve K-31141T-NA.

Install the wall-mount bathroom faucet valve K-31141T-NA before installing this product.

Turn OFF the water supplies.

READ ALL INSTRUCTIONS BEFORE INSTALLATION

SAVE THESE INSTRUCTIONS

Required Tools and Materials:

1A. Plumbers Putty

1B. 2 mm and 2.5 mm Hex Wrenches

Installation Steps:

2A. Remove the protectors from the valves K-31141T-NA after the wall is finished.

3A. Screw the connectors onto the valves with the provided key until the connectors are against the finished wall.

4A. Install the stems onto the valves, and then tighten with screws.

5A. Loosen the screws in the bottom of the handles with a 2 mm hex wrench. Ensure the valves are closed and install the handle assemblies onto the connectors. **Note:** Ensure the red indicator is on the left. Tighten the screws.

6A. Verify that the O-rings are in place on the connector.


6B. Install the connector into the valve with an adjustable wrench. **Note:** DO NOT overtighten.

7A. Turn ON the water supplies and check for leaks.

8A. Loosen the screw in the spout bottom with a 2.5 mm hex wrench. Install the spout onto the connector with the outlet facing downward until the spout is against the finished wall. Tighten the screw. **Note:** DO NOT damage the O-ring on the connector.

9A. When the installation is completed, the correct position of the spout and handles with the valve closed is as shown.

10A. Disassemble the drain.

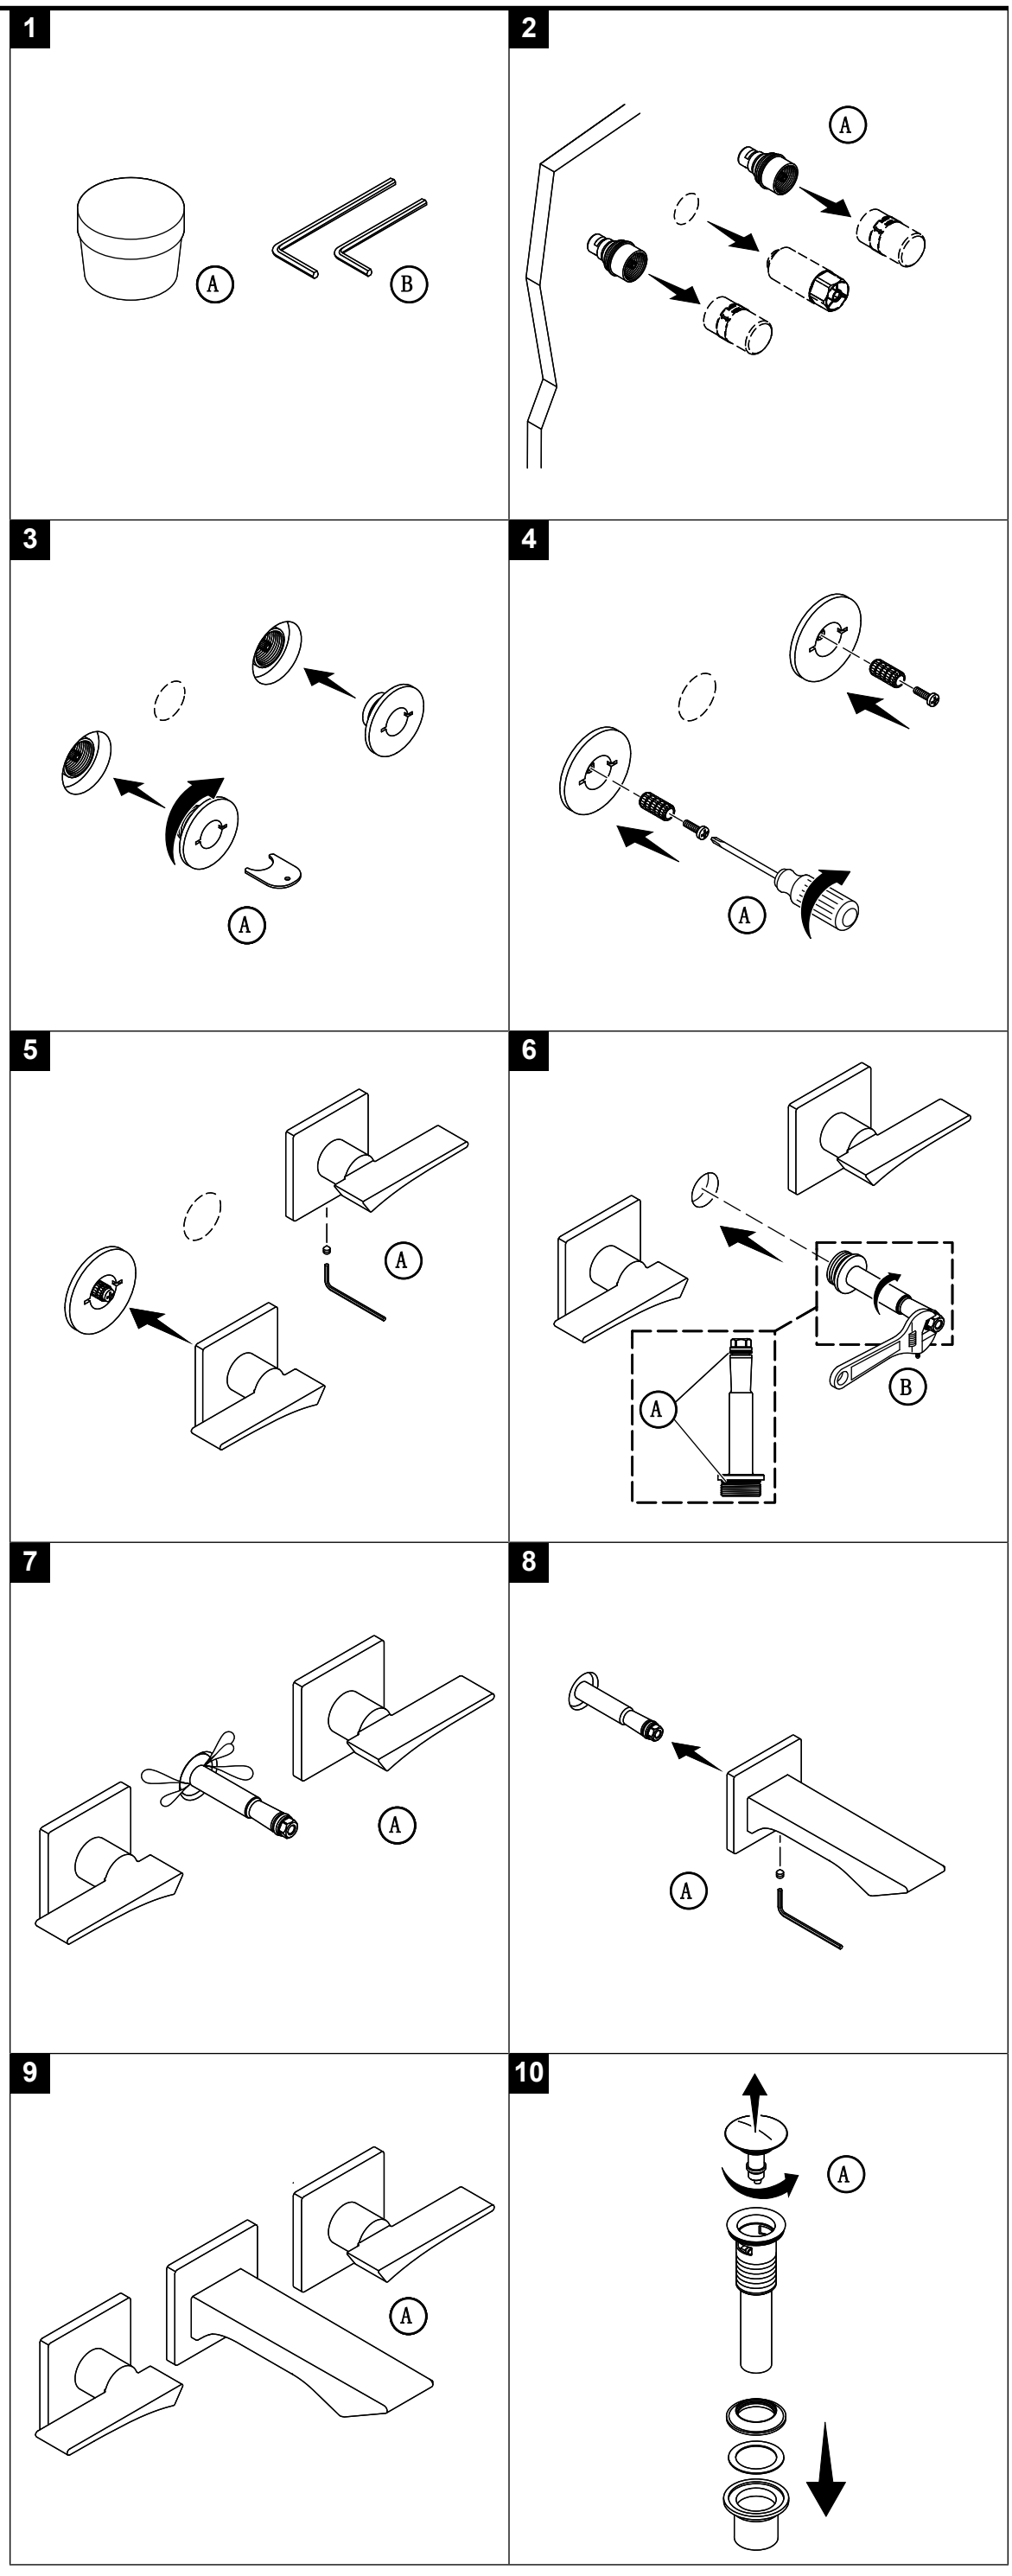

11A. If necessary, apply plumbers putty to the underside of the flange instead of using the rubber washer.

12A. Install the rubber gasket and plastic washer.

12B. Thread the nut onto the drain body and securely tighten using a wrench.

13A. Remove excess plumbers putty.

13B. Complete the drain installation.


13C. Test the stopper.

15A. Run water to flush debris. Reinstall the aerator and verify that the aerator is fully tightened.

Need help? Contact our Customer Care Center.

- Mainland China: +(86) 800-820-2628, +(86) 400-820-2628
- **Care and cleaning:** kohler.com.cn/support/care-and-cleaning/

This product is covered under the **Five-Year Limited Warranty for KOHLER® Faucets**, found in the packed Compliance Certification.

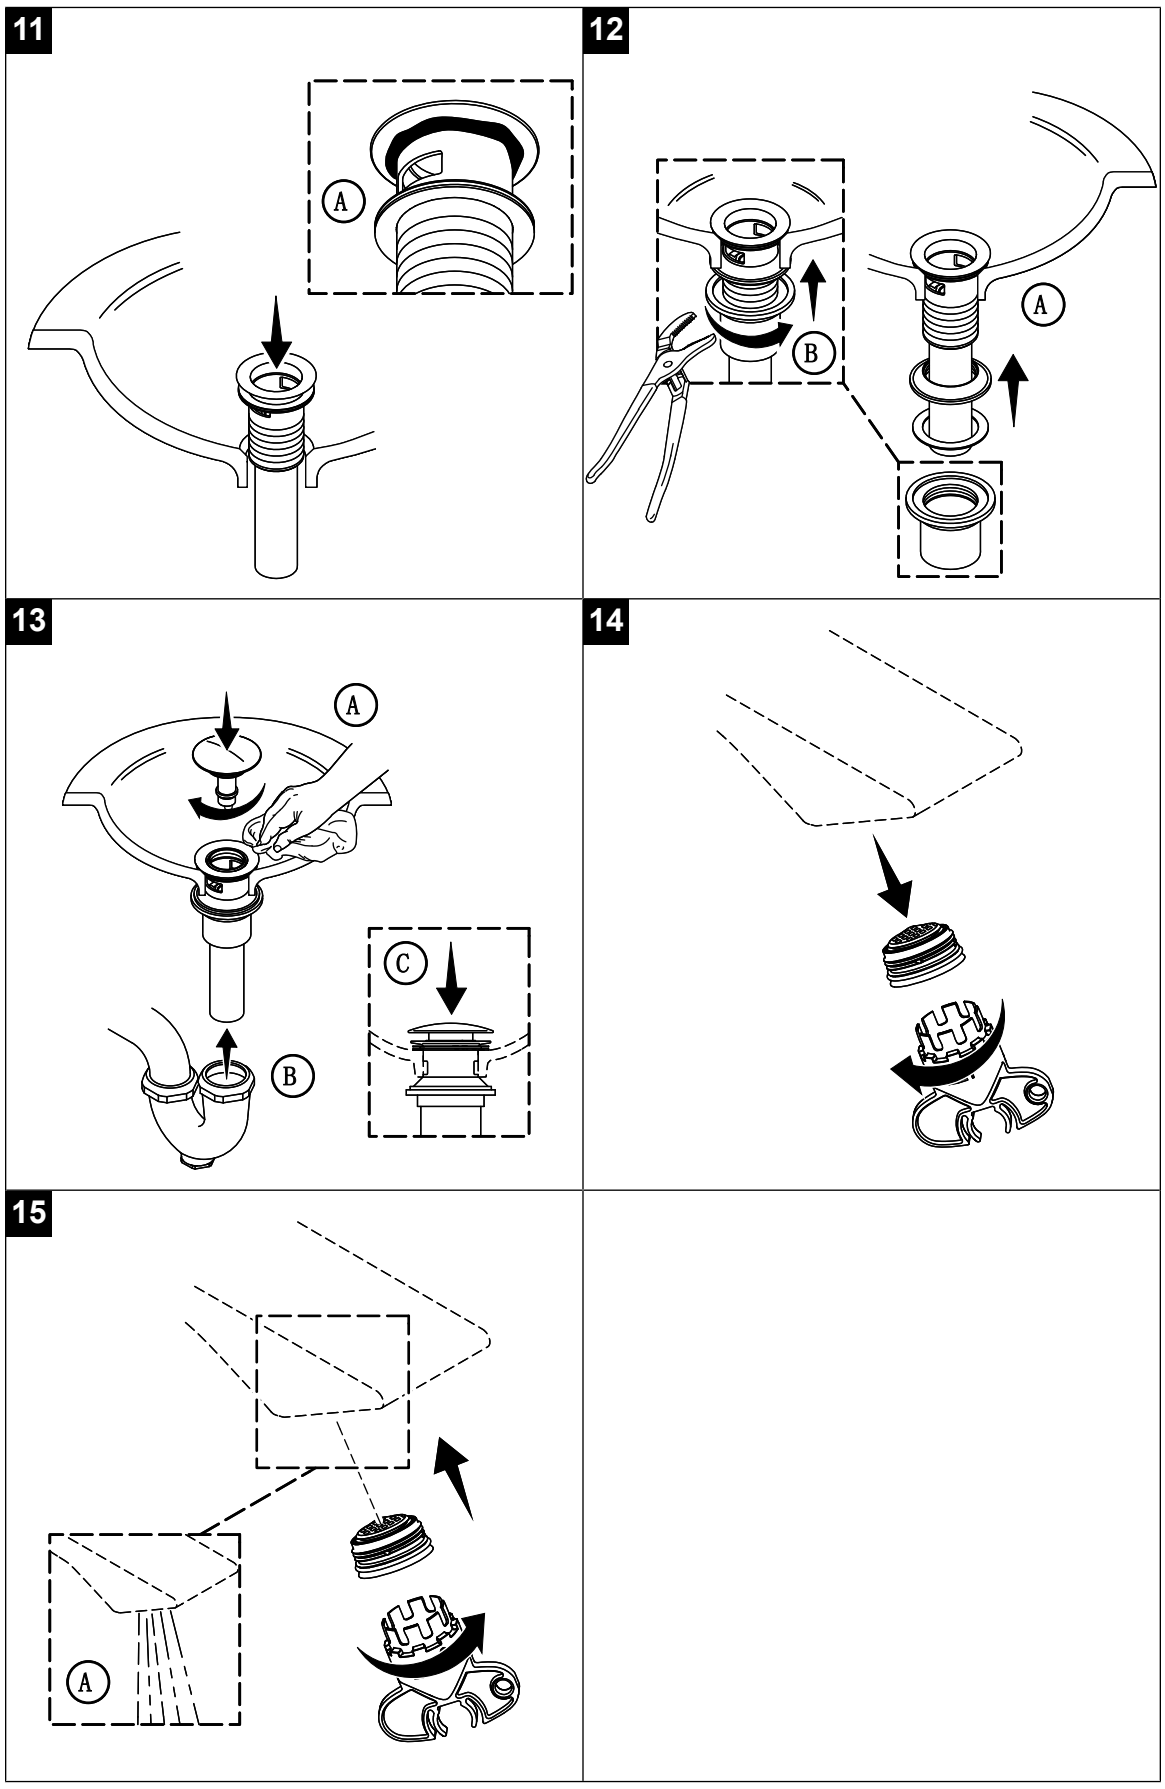

©2026 Kohler Co.