

1665585-T2

记录您的型号：
Record your model number:_____

重要信息! 水嘴加施的水效标识表明本产品的水效等级等性能符合 GB 25501-2019《水嘴水效限定值及水效等级》 的要求，是产品符合性的一种标识。

您的产品可能与所示图片效果有所不同，安装步骤相同。

请遵守当地管路安装及建筑条例。

本产品需与单把墙出水脸盆龙头阀芯 K-28028T-NA 搭配使用。

确保安装此产品之前，单把墙出水脸盆龙头阀芯 K-28028T-NA 已安装完毕。

关闭供水系统。

在安装或使用本产品之前阅读所有说明。

请保存说明书。

所需工具和材料：

1A. 管道油灰。

1B. 2.5 mm 六角扳手

安装步骤：

2A. 墙壁装修好后，去掉阀芯 K-28028T-NA 上的保护套。

3A. 请确认 O 形圈已安装在接头上。

3B. 用活动扳手将接头旋紧到阀体上。**注意：** 不要过份拧紧。

4A. 用 2.5 mm 六角扳手旋松出水口底部螺钉。将出水口出口朝下安装到接头上，使其紧贴墙面。锁紧螺钉。**注意：** 不要划伤接头上的 O 型圈。

5A. 拧紧螺钉和垫片到阀芯上。**注意：** 垫片方向如图所示，请勿错位安装。

6A. 安装套筒和装饰罩，直至与墙面接触。

7A. 用 2.5 mm 六角扳手旋松把手底部螺钉。将把手手柄朝下安装到阀柄上。锁紧螺钉。

8A. 将盖子穿过把手手柄扣紧到套筒上，带红色标志在左侧。

9A. 阀芯处于关闭位置时，出水口和把手安装完毕状态如图所示。

10A. 拆卸排水器。

11A. 如果需要，在法兰盘底部涂管道油灰，而不使用橡胶垫片。

12A. 安装橡胶垫圈和塑料垫片。

12B. 将螺母旋到排水本体上，并用扳手拧紧。

13A. 去除多余油灰。

13B. 完成排水组件的安装。

13C. 测试止水塞能否正常使用。

14A. 打开供水管，检查渗漏。

16A. 打开水龙头，去除杂质。装回起泡器，确认起泡器完全拧紧。

需要帮助？ 请联系我们的客户服务中心。

- 中国大陆：+(86) 800-820-2628, +(86) 400-820-2628
- **保养和清洁：** kohler.com.cn/support/care-and-cleaning/

本产品支持**科勒®水龙头五年有限担保**，详见包装所附的《合格证》。

IMPORTANT! The water efficiency label applied to the faucet indicates that the water efficiency grade and other performance of the product meet the requirements of GB 25501-2019 "Minimum Allowable Values of Water Efficiency and Water Efficiency Grades for Faucets" which is a marking of product conformity.

The product shown may differ from your actual product. The installation steps still apply.

Follow all local plumbing and building codes.

This product should be used with the wall-mount bathroom faucet valve K-28028T-NA.

Install the wall-mount bathroom faucet valve K-28028T-NA before installing this product.

Turn OFF the water supplies.

READ ALL INSTRUCTIONS BEFORE INSTALLATION

SAVE THESE INSTRUCTIONS

Required Tools and Materials:

1A. Plumbers Putty

1B. 2.5 mm Hex Wrench

Installation Steps:

2A. Remove the protectors from the valve K-28028T-NA after the wall is finished.

3A. Verify that the O-rings are in place on the connector.

3B. Install the connector into the valve with an adjustable wrench. **Note:** DO NOT overtighten.

4A. Loosen the screw in the spout bottom with a 2.5 mm hex wrench. Install the spout onto the connector with the outlet facing downward until the spout is against the finished wall. Tighten the screw. **Note:** DO NOT damage the O-ring on the connector.


5A. Tighten the screw and washer onto the valve. **Note:** Install the washer in the orientation shown. DO NOT install misaligned.

6A. Install the sleeve and escutcheon until they are against the finished wall.

7A. Loosen the screw in the handle bottom with a 2.5 mm hex wrench. Install the handle onto the valve stem. Tighten the screw.

8A. Slide the cap through the handle and secure the cap onto the sleeve, with the red indicator on the left.

9A. When the installation is completed, the correct position of the spout and handle with the valve closed is as shown.

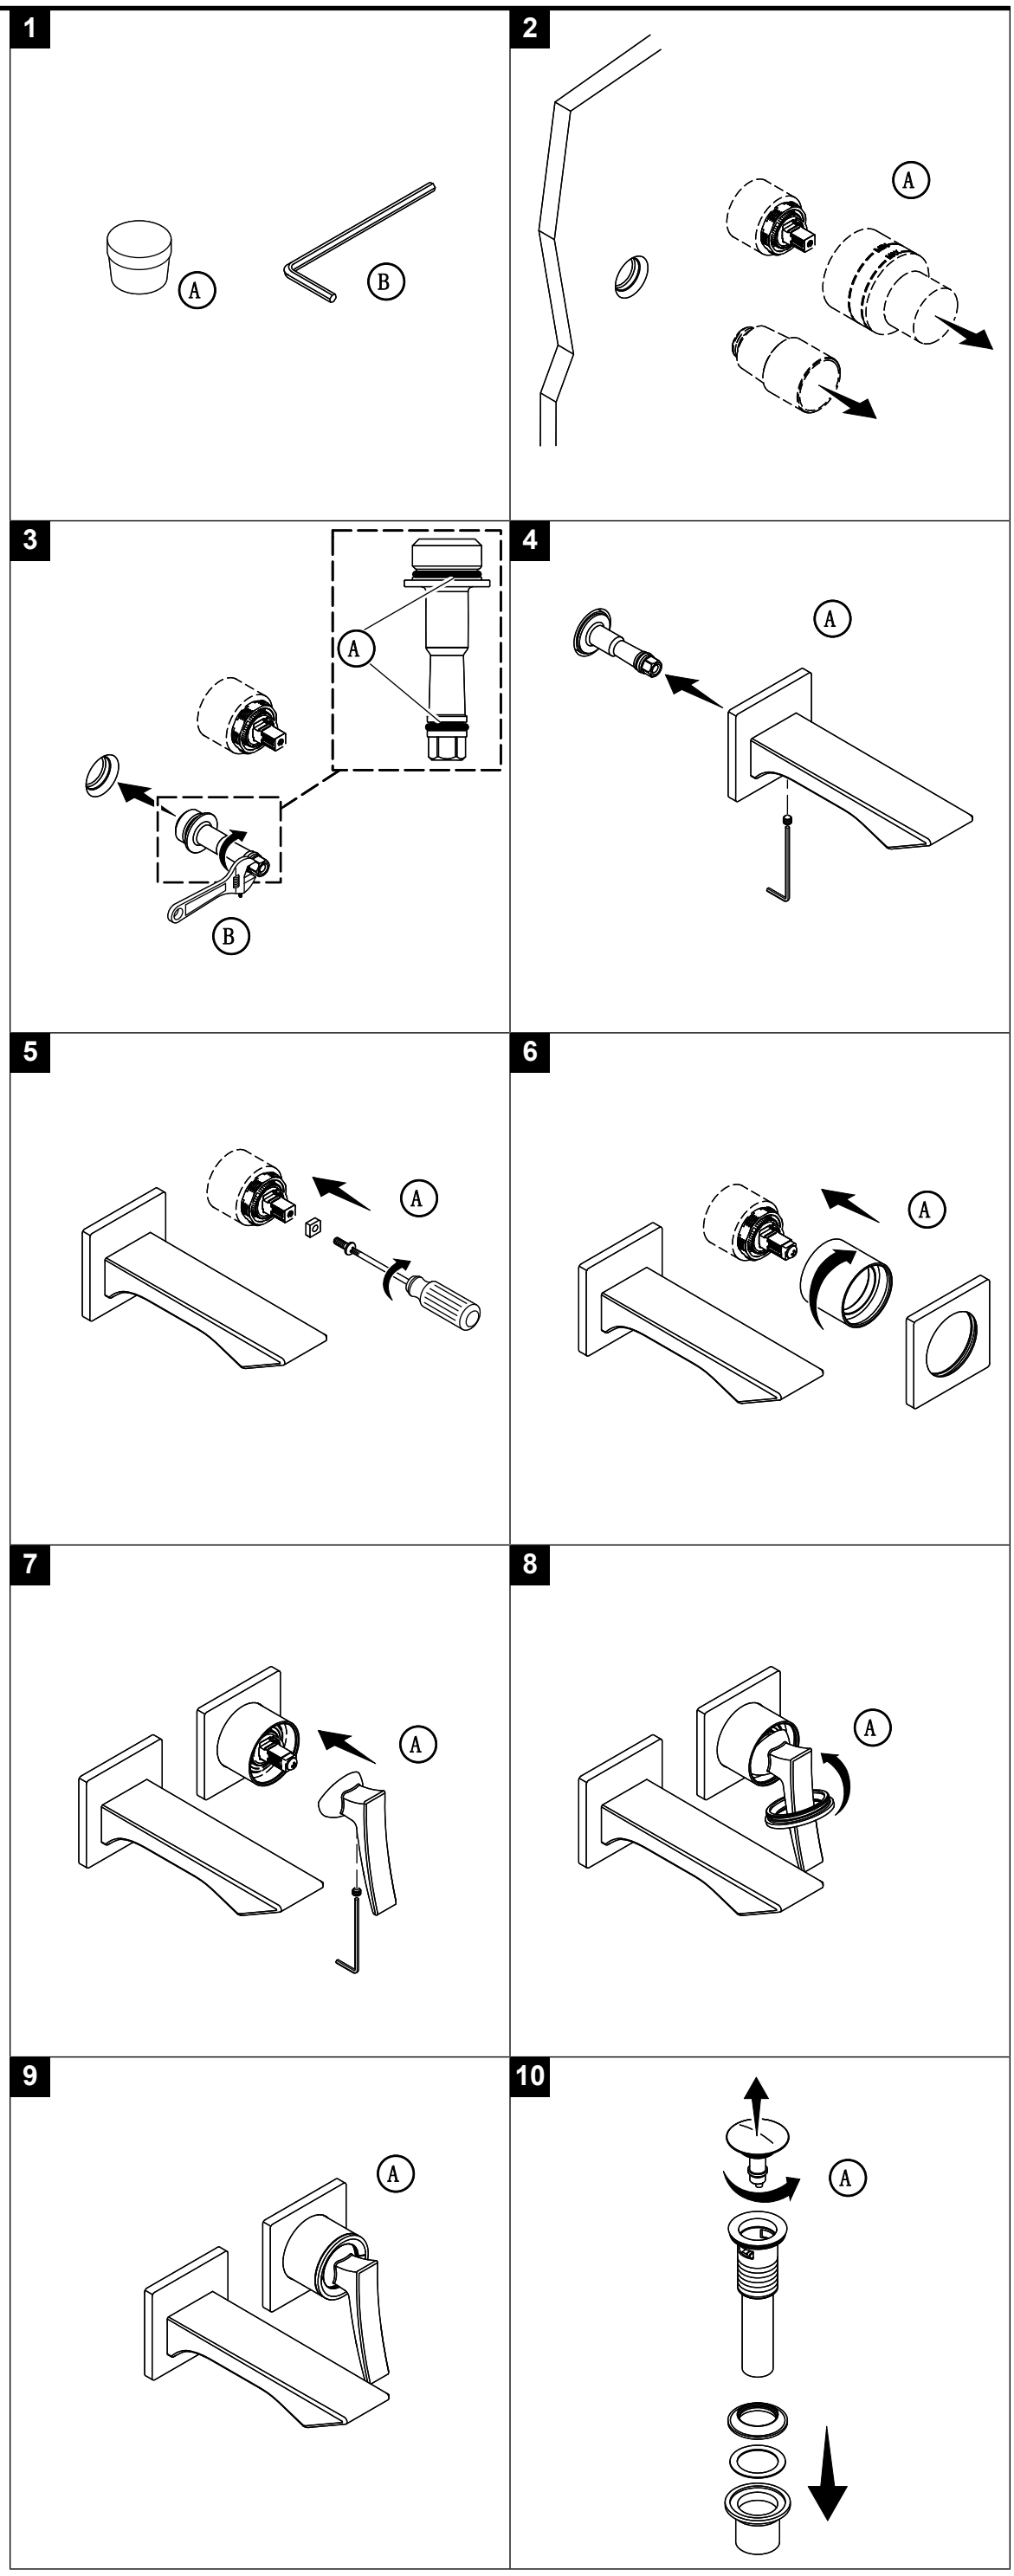

10A. Disassemble the drain.

11A. If necessary, apply plumbers putty to the underside of the flange instead of using the rubber washer.

12A. Install the rubber gasket and plastic washer.

12B. Thread the nut onto the drain body and securely tighten using a wrench.

13A. Remove excess plumbers putty.

13B. Complete the drain installation.

13C. Test the stopper.


14A. Turn ON the water supplies and check for leaks.

16A. Run water to flush debris. Reinstall the aerator and verify that the aerator is fully tightened.

Need help? Contact our Customer Care Center.

- Mainland China: +(86) 800-820-2628, +(86) 400-820-2628
- **Care and cleaning:** kohler.com.cn/support/care-and-cleaning/

This product is covered under the **Five-Year Limited Warranty for KOHLER® Faucets**, found in the packed Compliance Certification.

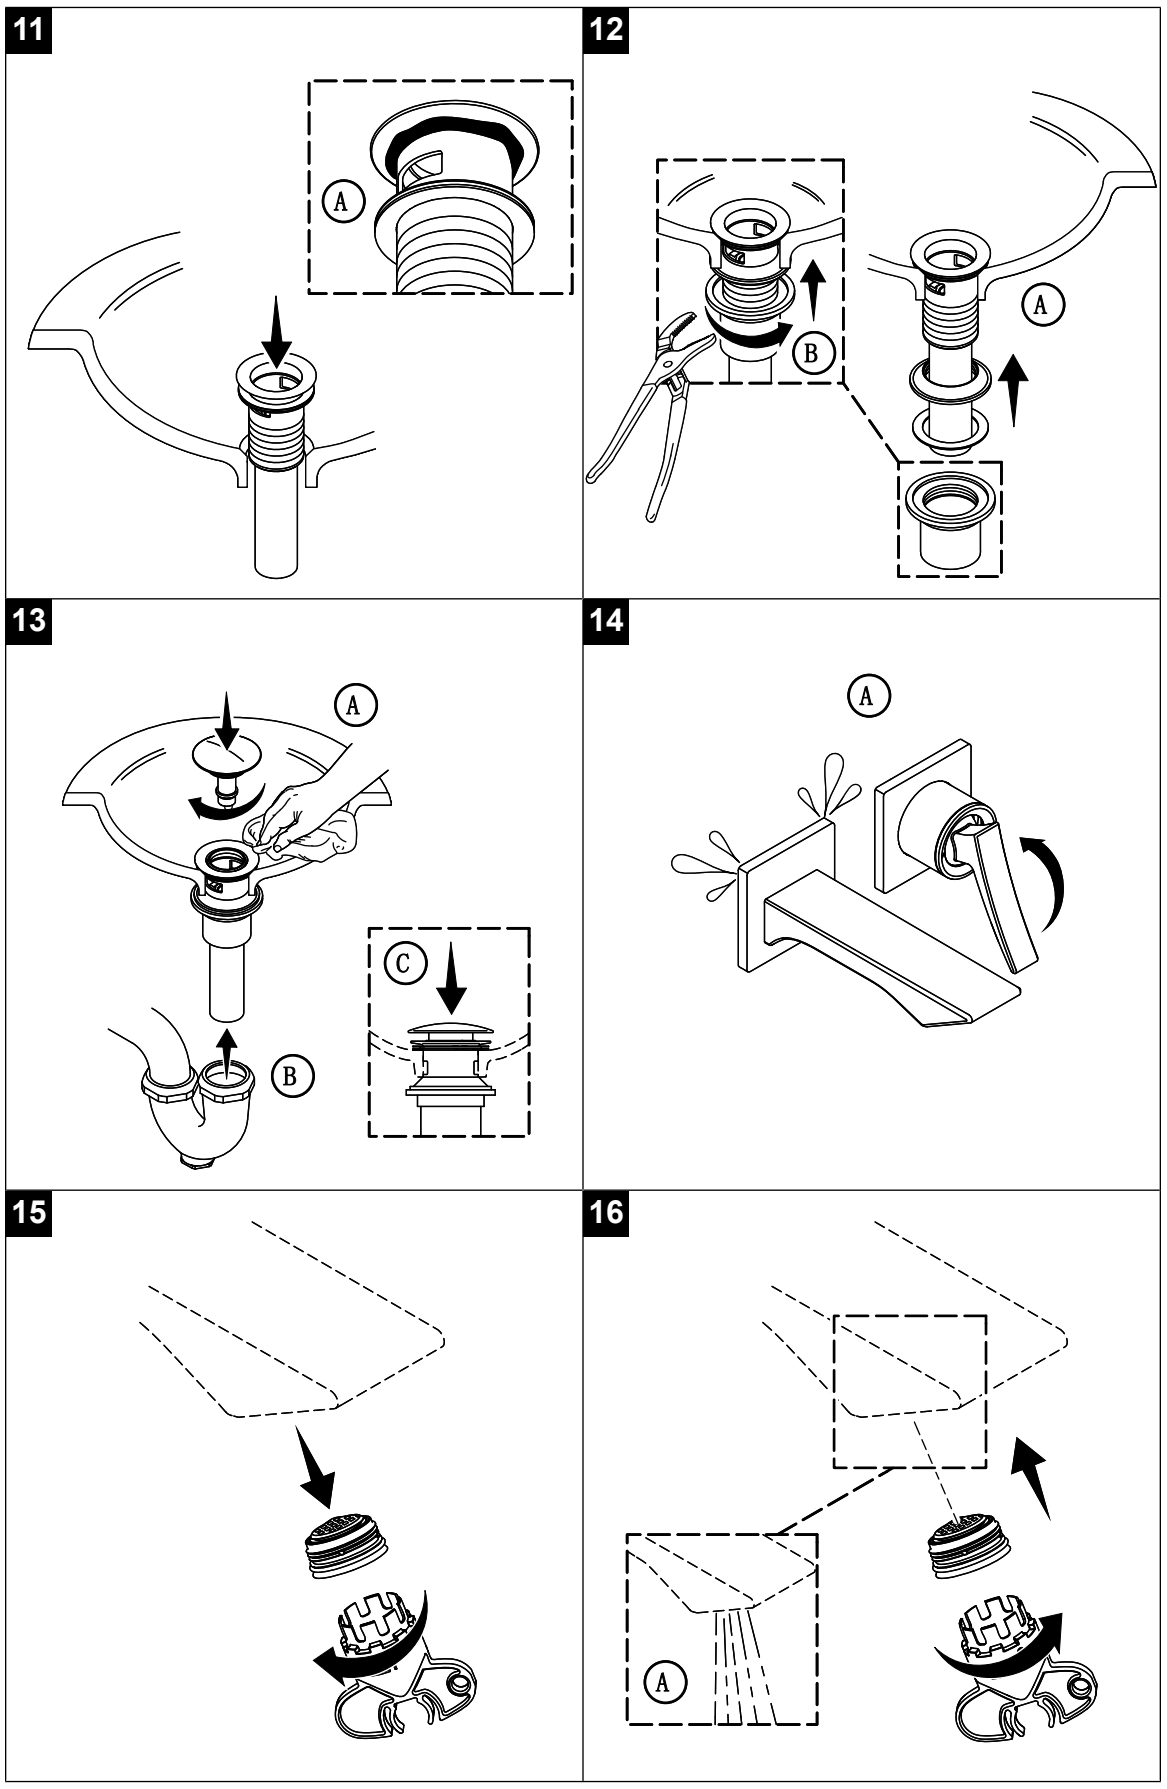

©2026 Kohler Co.