

1665584-T2

记录您的型号：
Record your model number:_____

重要信息! 水嘴加施的水效标识表明本产品的水效等级等性能符合 GB 25501-2019《水嘴水效限定值及水效等级》 的要求，是产品符合性的一种标识。

您的产品可能与所示图片效果有所不同，安装步骤相同。

请遵守当地管路安装及建筑条例。

如果可能，在安装台盆之前，将水龙头安装到台盆上。

关闭供水系统。

在安装或使用本产品之前阅读所有说明。

请保存说明书。

所需工具和材料：

1A. 管道油灰。

1B. 2 mm 六角扳手

安装步骤：

2A. 将螺杆顺时针旋紧到龙头本体底部。安装垫片到装饰盖底部凹槽。

3A. 将水龙头插入安装孔中。

4A. 按顺序将橡胶垫片、金属垫片和螺母装入螺杆。使用随附的套筒工具拧紧螺母。

5A. 将螺钉部分穿过安装环。

6A. 将安装环旋紧到左右阀体上。将左右阀体和把手组件装入安装孔。带红色标志的阀体组件和把手组件在左侧。

7A. 确认把手处于关闭位置。把手方向如图所示。

8A. 连接软管和阀体组件出水口。

8B. 安装 T 型接头。旋紧软管到 T 型接头上。

9A. 拆卸排水器。

10A. 如果需要，在法兰盘底部涂管道油灰，而不使用橡胶垫片。

11A. 安装橡胶垫圈和塑料垫片。

11B. 将螺母旋到排水本体上，并用扳手拧紧。

12A. 去除多余油灰。

12B. 完成排水组件的安装。

12C. 测试止水塞能否正常使用。

14A. 打开供水管，检查渗漏。

16A. 打开水龙头，去除杂质。装回起泡器，确认起泡器完全拧紧。

需要帮助？ 请联系我们的客户服务中心。

- 中国大陆：+(86) 800-820-2628, +(86) 400-820-2628
- **保养和清洁：** kohler.com.cn/support/care-and-cleaning/

本产品支持**科勒®水龙头五年有限担保**，详见包装所附的《合格证》。

IMPORTANT! The water efficiency label applied to the faucet indicates that the water efficiency grade and other performance of the product meet the requirements of GB 25501-2019 "Minimum Allowable Values of Water Efficiency and Water Efficiency Grades for Faucets" which is a marking of product conformity.

The product shown may differ from your actual product. The installation steps still apply.

Follow all local plumbing and building codes.

If possible, assemble the faucet to the bathroom sink before installing the bathroom sink.

Turn OFF the water supplies.

READ ALL INSTRUCTIONS BEFORE INSTALLATION

SAVE THESE INSTRUCTIONS

Required Tools and Materials:

1A. Plumbers Putty

1B. 2 mm Hex Wrench

Installation Steps:

2A. Handtighten the stud into the faucet body. Install the gasket into the groove at the bottom of the escutcheon.

3A. Insert the spout into the mounting hole.

4A. Slide the rubber washer and metal washer and thread the nut onto the stud in sequence. Tighten the nut using the provided socket tool.

5A. Partially thread the screws into the ring.

6A. Slide the rings onto the left and right valve bodies. Insert the left and right valve bodies and the handle assemblies into the mounting holes. Position the valve body and handle with the red indicator on the left side.

7A. Verify that the handles are in the OFF position. Align the handles as shown.

8A. Connect the hoses to the outlets of the valve bodies.

8B. Install the tee. Tighten the hoses onto the tee.

9A. Disassemble the drain.

10A. If necessary, apply plumbers putty to the underside of the flange instead of using the rubber washer.


11A. Install the rubber gasket and plastic washer.

11B. Thread the nut onto the drain body and securely tighten using a wrench.

12A. Remove excess plumbers putty.

12B. Complete the drain installation.

12C. Test the stopper.

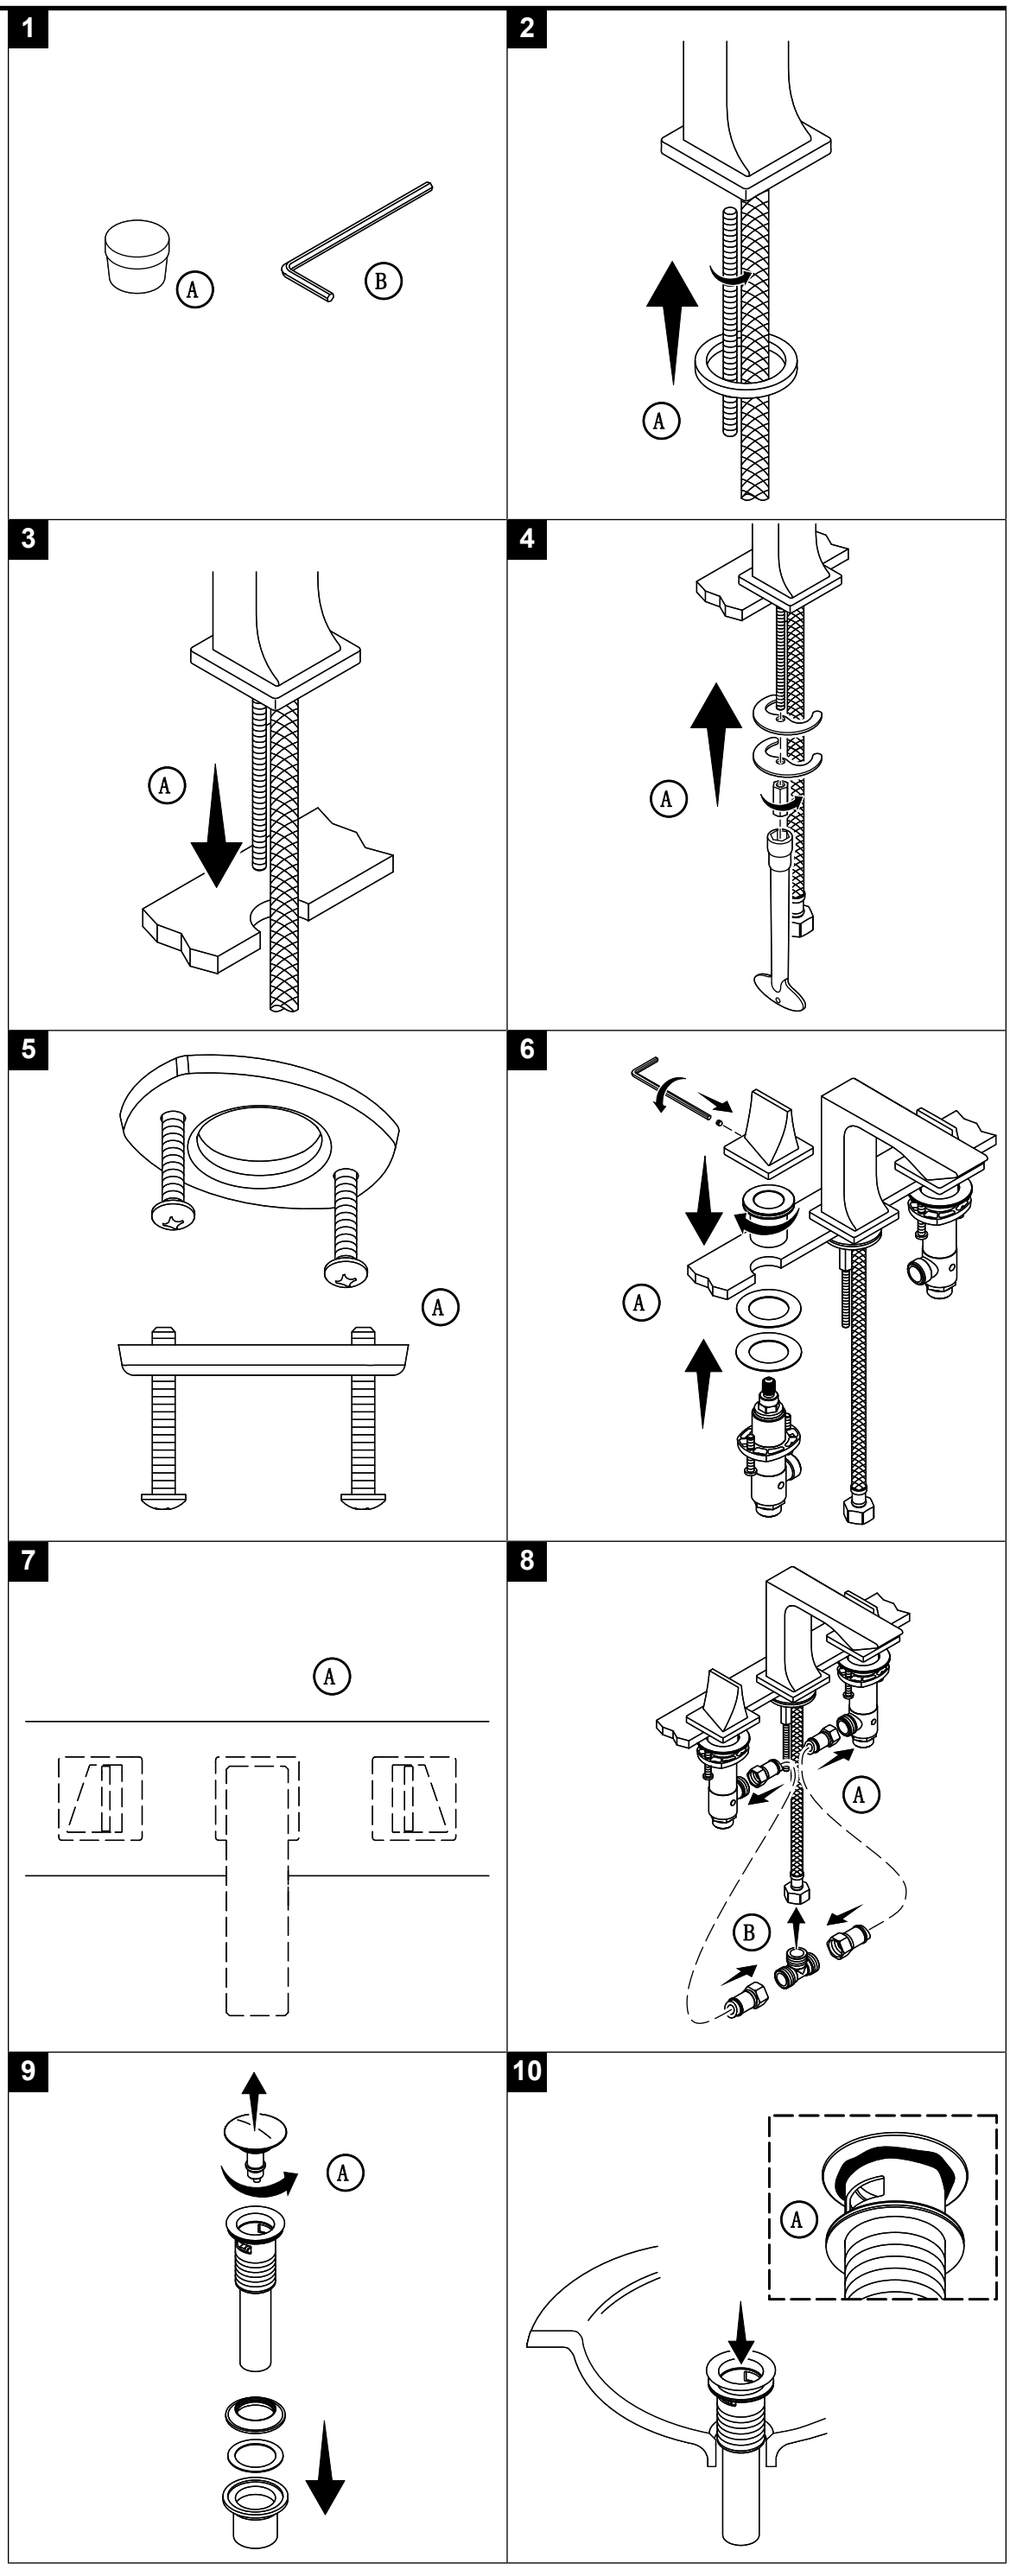


14A. Turn ON the water supplies and check for leaks.

16A. Run water to flush debris. Reinstall the aerator and verify that the aerator is fully tightened.

Need help? Contact our Customer Care Center.

- Mainland China: +(86) 800-820-2628, +(86) 400-820-2628
- **Care and cleaning:** kohler.com.cn/support/care-and-cleaning/

This product is covered under the **Five-Year Limited Warranty for KOHLER® Faucets**, found in the packed Compliance Certification.

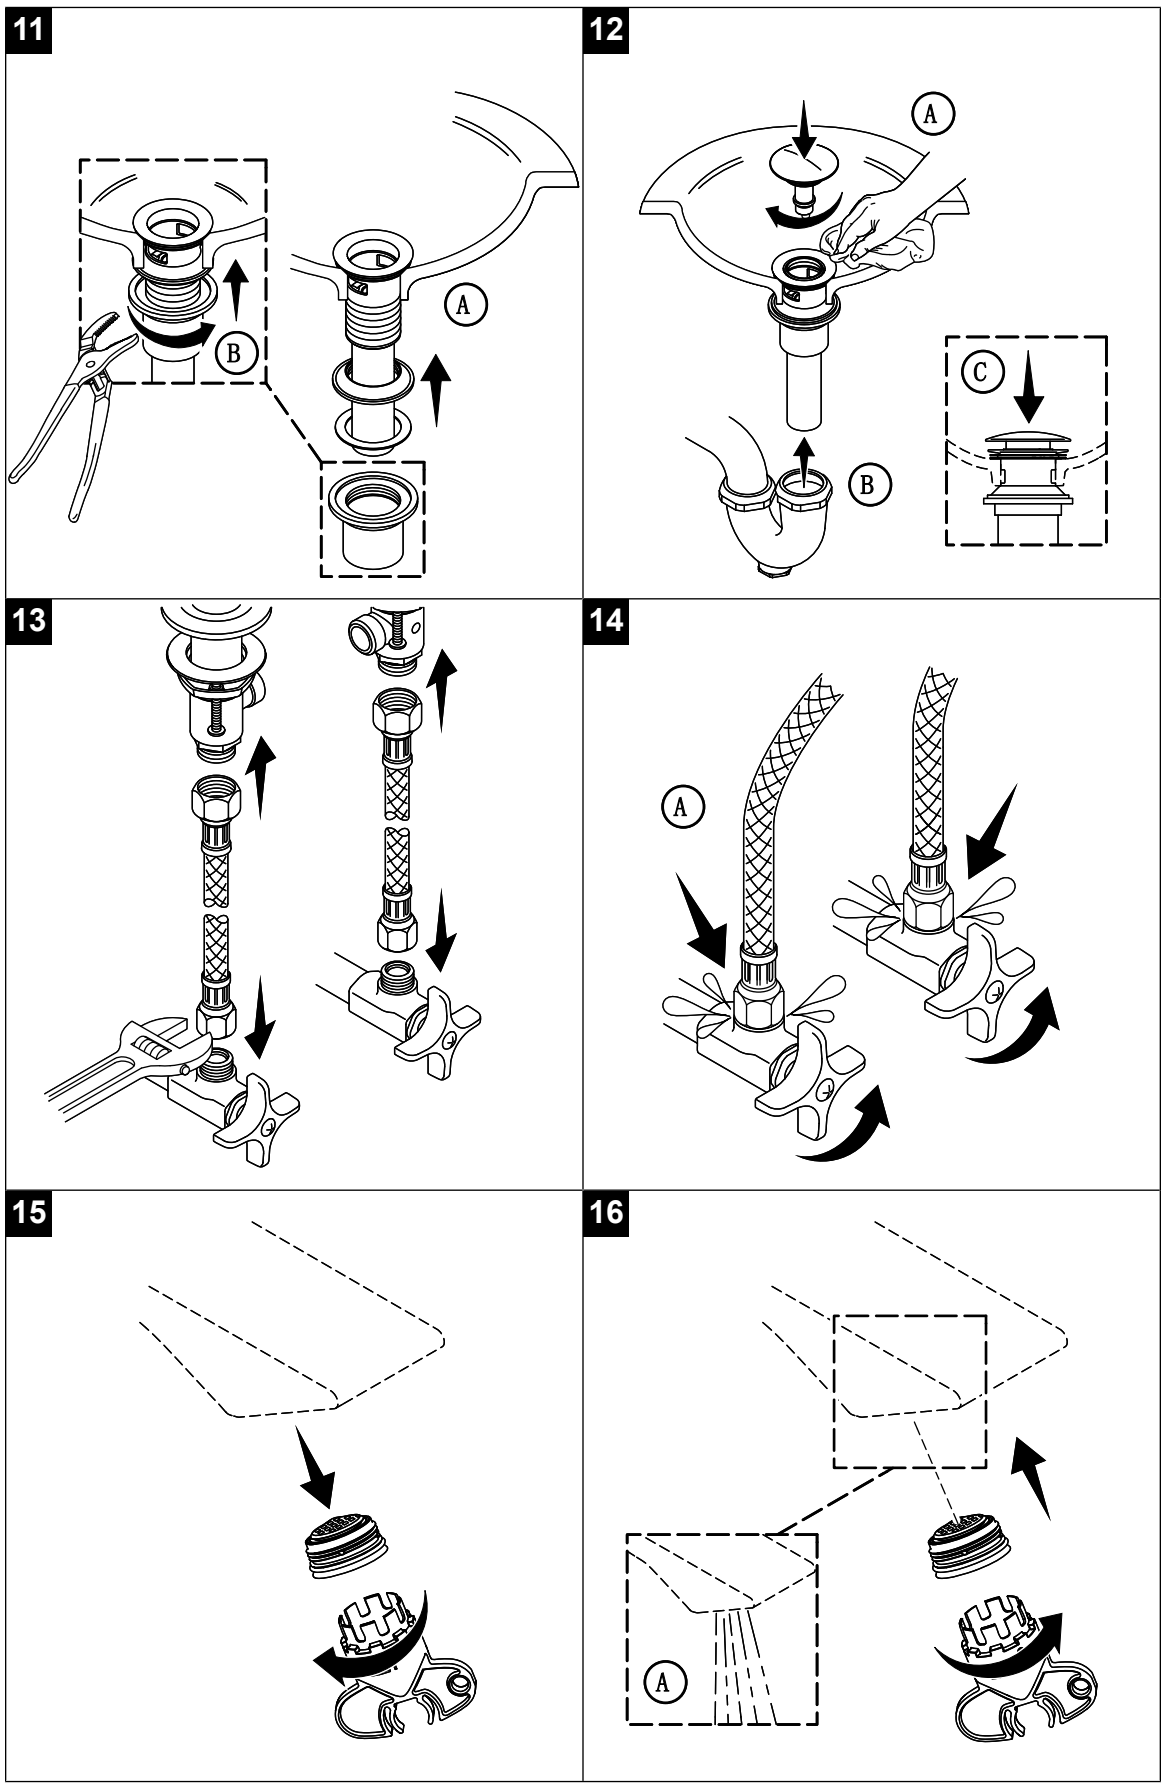

©2026 Kohler Co.