

1663034-T2

记录您的型号：
Record your model number:_____

重要信息! 水嘴加施的水效标识表明本产品的水效等级等性能符合 GB 25501-2019《水嘴水效限定值及水效等级》 的要求，是产品符合性的一种标识。

您的产品可能与所示图片效果有所不同，安装步骤相同。

请遵守当地管路安装及建筑条例。

如果可能，在安装台盆之前，将水龙头安装到台盆上。

关闭供水系统。

安装完成后，请将起泡器工具卡在软管上妥善保存，以便后续再次使用。

在安装或使用本产品之前阅读所有说明。

请保存说明书。

所需工具和材料：

1A. 管道油灰。

安装步骤：

2A. 将螺杆顺时针旋紧到龙头本体底部。安装垫片到装饰盖底部凹槽。

3A. 将水龙头插入安装孔中。

4A. 定位水龙头，使出水口朝前。按顺序将橡胶垫片、金属垫片和螺母装入螺杆。使用随附的套筒工具拧紧螺母。

5A. 拆卸排水器。

6A. 安装法兰盘和橡胶垫片。如果需要，在法兰盘底部涂管道油灰，而不使用橡胶垫片。

7A. 锁紧螺母。

8A. 打开盖板，按图示将提拉线缆末端嵌入拉线盒内部方孔中。扣紧盖板，并确认排水器正常工作。

9A. 去除多余管道油灰。

10A. 连接热水管。

10B. 连接冷水管。

11A. 打开供水管，检查渗漏。

13A. 打开水龙头，去除杂质。装回起泡器，确认起泡器完全拧紧。

需要帮助？ 请联系我们的客户服务中心。

- 中国大陆：+(86) 800-820-2628, +(86) 400-820-2628
- **保养和清洁：** kohler.com.cn/support/care-and-cleaning/

本产品支持**科勒®水龙头五年有限担保**，详见包装所附的《合格证》。

IMPORTANT! The water efficiency label applied to the faucet indicates that the water efficiency grade and other performance of the product meet the requirements of GB 25501-2019 "Minimum Allowable Values of Water Efficiency and Water Efficiency Grades for Faucets" which is a marking of product conformity.

The product shown may differ from your actual product. The installation steps still apply.

Follow all local plumbing and building codes.

If possible, assemble the faucet to the bathroom sink before installing the bathroom sink.

Turn OFF the water supplies.

After installation, clip the aerator tool onto the hose and retain the aerator tool for reuse.

READ ALL INSTRUCTIONS BEFORE INSTALLATION

SAVE THESE INSTRUCTIONS

Required Tools and Materials:

1A. Plumbers Putty

Installation Steps:

2A. Handtighten the stud into the faucet body. Install the gasket into the groove at the bottom of the escutcheon.

3A. Insert the spout into the mounting hole.

4A. Position the faucet with the spout facing forward. Slide the rubber washer and metal washer and thread the nut onto the stud in sequence. Tighten the nut using the provided socket tool.

5A. Disassemble the drain.

6A. Install the flange and rubber washer. If necessary, apply plumbers putty to the underside of the flange instead of using the rubber washer.

7A. Tighten the nut.

8A. Open the cover plate and insert the cable as shown. Close the cover plate and verify that the drain cable operates properly.

9A. Remove excess plumbers putty.

10A. Hot Connection

10B. Cold Connection


11A. Turn ON the water supplies and check for leaks.

13A. Run water to flush debris. Reinstall the aerator and verify that the aerator is fully tightened.


Need help? Contact our Customer Care Center.

- Mainland China: +(86) 800-820-2628, +(86) 400-820-2628
- **Care and cleaning:** kohler.com.cn/support/care-and-cleaning/


This product is covered under the **Five-Year Limited Warranty for KOHLER® Faucets**, found in the packed Compliance Certification.

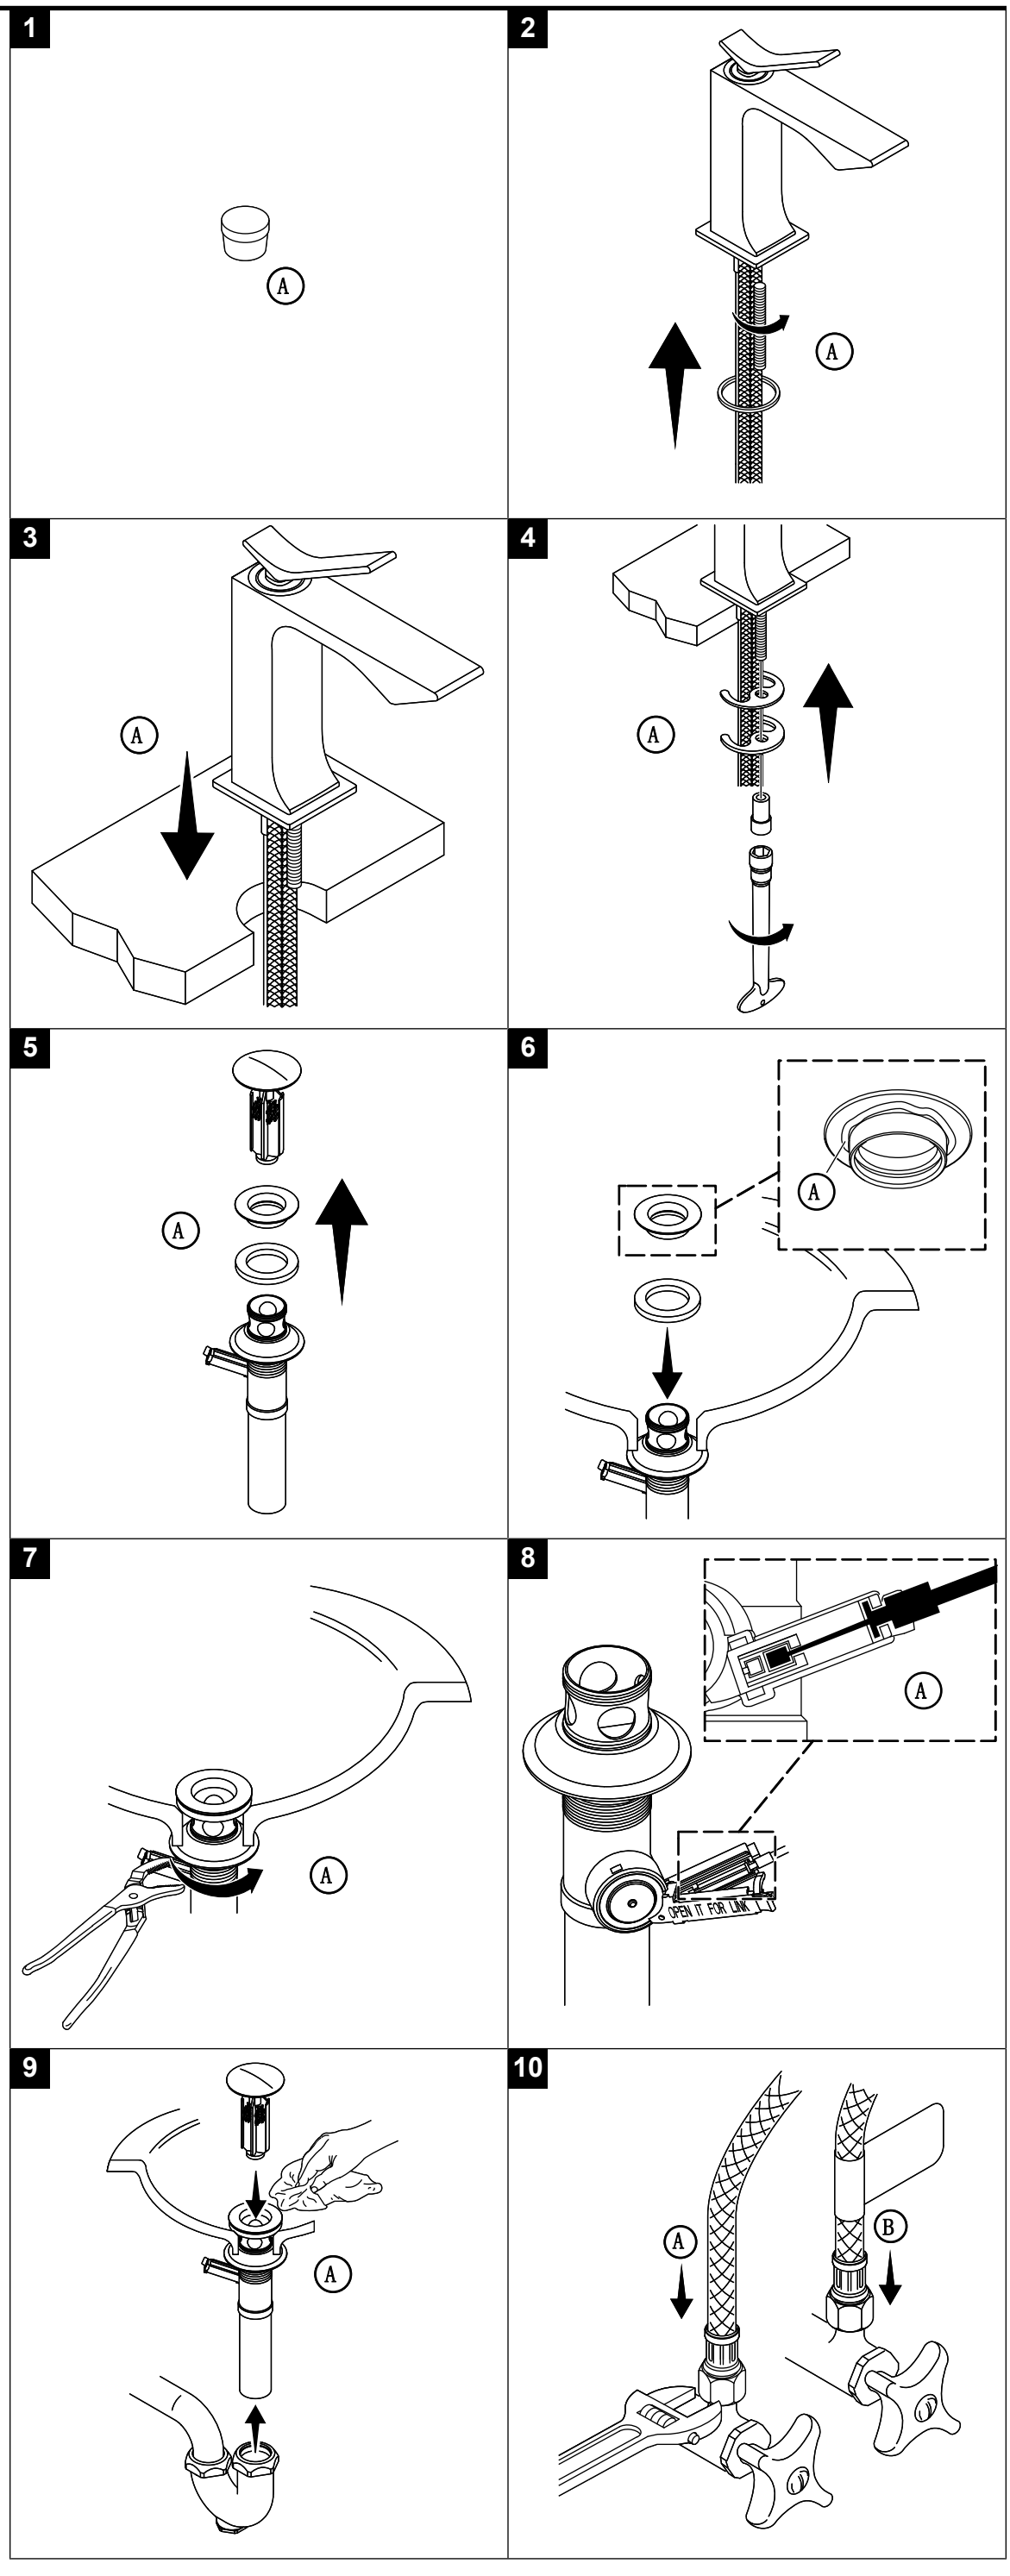


11

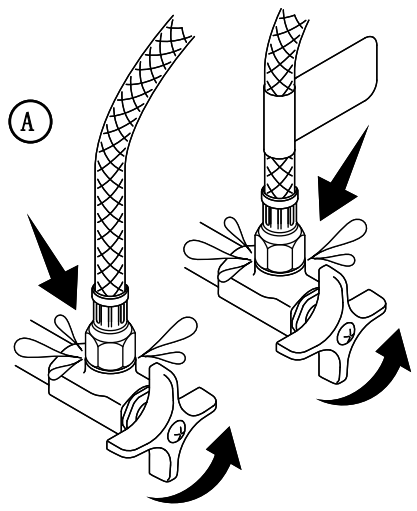

12

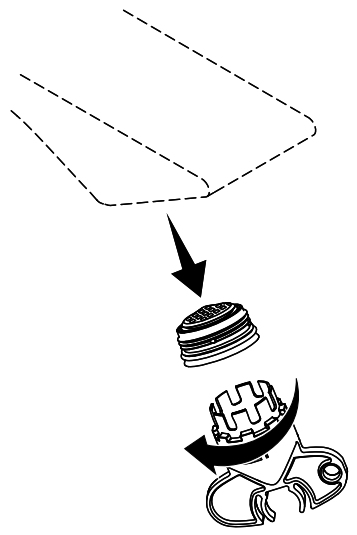

13

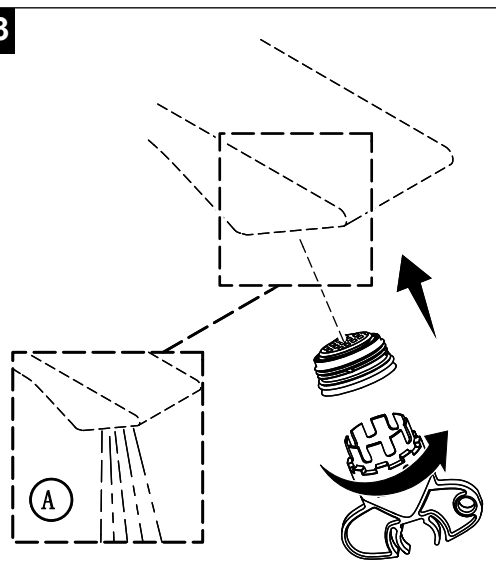

©2026 Kohler Co.